



DUCHESNE
Solidly Dependable®



STEEL ROOFING AND SIDING

MOULDINGS AND ACCESSORIES

WWW.DUCHESNE.CA

DUCHESNE STEEL PRODUCTS: ATTRACTIVE AND LONG-LASTING.

EASY TO INSTALL AND MADE TO LAST, DUCHESNE SIDING AND ROOFING PRODUCTS ARE OFFERED IN A WELL DEFINED RANGE OF PRODUCTS WITH DISTINCTIVE FEATURES.

A CUSTOMIZABLE STYLE ACCORDING TO YOUR IMAGINATION

- Over 28 steel profiles for wall and roof applications
- Unique colour selection offered in a variety of thicknesses
- Complete range of trims and accessories

REMARKABLE DURABILITY

- Undeniable robustness
- Paint system resistant to fading, chalking and chipping
- Made to resist the contrasts peculiar to the North American weather conditions

A WISE INVESTMENT

- Minimum maintenance
- Duchesne steel products add value and distinction to your property while offering long term savings and a lifetime peace of mind
- Product containing recycled, recyclable and environment-friendly components that can contribute to obtain credits in the scope of a LEED® project
- ISO 9001:2015 certification regarding the design, development and manufacturing of sheet metal siding



MODELS ADAPTED IN ACCORDANCE WITH ANY TYPE OF PROJECT



residential




agricultural



commercial



industrial



MY COLOUR UNIVERSE®

Duchesne offers a unique colour match system in three complementary lines of exterior siding — aluminum, vinyl and steel. **My Colour Universe®** system gives you the flexibility of combining different materials of the same or harmonized colour in one project.

TABLE OF CONTENTS

Steel siding and roofing in general	2	
Duchesne steel products	2	
Important notice.....	5	
Available colours	9	
Colour availability chart by profile and steel thickness	12	
Steel profiles for roofing	14	
TR 5	16	
TR 7	18	
TR 9	20	
TR 80	22	
TR 11	24	
Steel profiles for siding	25	
LC 15	28	
LC 17	29	
LC 19	30	
LC 23	31	
LC 25	32	
LC 27	33	
LC 27 RG	34	
LC 29	35	
LC 29 RG	36	
LCD 6 with groove	37	
LCD 6 without groove.....	37	
LCD 8 with groove.....	39	
LCD 8 without groove.....	39	
LCD 11 with groove	41	
LCD 11 without groove	41	
LCD 12 with groove	43	
LCD 12 without groove	43	
Steel profiles for roofing and siding - Corrugated.....	45	
CRG 7/8 30.3	47	
CRG 7/8 38.6	48	
Concealed fasteners steel profiles.....	49	
Authentik™ with nail strip.....	51	
Authentik™ with clips.....	52	
Classik™	54	
Majestik™	56	
Bending tools.....	58	
Seaming tools.....	59	
Mouldings for roofing and siding.....	60	
Standard steel mouldings for siding	61	
Conversion Trim	62	
Drip moulding.....	62-63	
Finishing trim.....	63	
Flashing.....	63	
Inside corner	64	
"J" Trim	65	
"L" Trim	65	
Opening Trim.....	66	
Outside corner	66-67	
Partition moulding	67	
Starter strip	68	
Standard Steel mouldings for roofing	69	
Cottage hip cap	70	
Fastener.....	70	
Flashing.....	70-71	
Front flashing.....	71	

TABLE OF CONTENTS

Gable end trim Classik™	72
Gable starter Classik™	72
Gable trim	72
Gable trim Authentik™	72
Gable trim Majestik™	73
Half ridge vent	73
"J" Trim	73
Ridge cap	74-75
Ridge hip cap	75
Roof transition	75
Side flashing	76
Sidewall flashing	76-77
Starter fastener	77
Transition - Reversed hip cap	77
Valleys	78

Made to measure steel mouldings for roofing and siding 79-80

Architectural mouldings 81

Accessories 82

Vented ridge	83
Deflector for vented ridge	83
Low profile vent	83
Rubber pipe flashings	83
Screws for roofing and siding	84
Caulking	85
Touch-up paint	85
Roofing underlayment	85
Plastic cap nails	85
Snow guards	86
Snow breaker	86
Foam closure strip and other accessories	87
Sub-Girts	88

Flat steel in sheets and coils 89

Metal products 91

Galvanized side flashing	92
Galvanized front flashing	93

Services 94

Product samples	95
-----------------	----

IMPORTANT NOTICE

GENERAL

PRODUCT INSPECTION BEFORE INSTALLATION

AVAILABLE
COLOURS

Any defect related to the appearance of siding products, mouldings and accessories must be communicated to Duchesne et Fils Ltée before the installation of the product.

Duchesne et Fils Ltée reserves the right to refuse any request for reimbursement of expenses related to the installation of the product (labor, equipment, etc.) for any defect that could have been detected before the installation.

ROOFING

PROCEDURE REGARDING THE STORAGE, HANDLING AND CUTTING OF STEEL AND ALUMINUM ROOFING AND SIDING

SIDING

Galvanized and prepainted steel sheets must be stored in a dry place. Always allow air circulation between the sheets in order to avoid condensation. To prevent the development of marks, separate and immediately wipe dry wet sheet.

If you use a saw to cut steel or aluminum, the following precautions must be taken :

ROOFING
AND SIDING -
CORRUGATED

- a) Use a high speed abrasive saw in good condition.
- b) Turn prepainted sheets upside down (prepainted surface facing the ground).
- c) Cut sheets away from sheets already installed or to be installed so that hot metal fillings produced by the saw do not damage these sheets, especially on angle cuts.
- d) We suggest the use of metal hand shears to remove burrs from sheets.

CONCEALED
FASTENERS

HANDLING AND INSTALLING GALVALUME AND GALVANIZED STEEL

MOULDINGS

Excessive foot traffic involving hard-soled shoes on bare Galvalume roofs will cause the surface to become abraded, resulting in black burnish marks. While the dark areas are not defects and will not adversely affect product performance, they are visually apparent and generally impossible to remove. Provisions should be made for a properly designed and installed roof walkway system if regular foot traffic is planned.

ACCESSORIES

Hand and palm prints on bare galvanized and Galvalume panels are the likely result of not using clean gloves in handling the panels during installation. Dirt, oil and perspiration have been shown to be detrimental to the appearance of bare coated products, such as galvanized and Galvalume coated sheet steels.

FLAT STEEL

METAL
PRODUCTS

SERVICES

IMPORTANT NOTICE

GALVALUME AND HOG CONFINEMENT BUILDINGS ¹

Galvalume has been used extensively for many years as a material for roofing and cladding in the construction industry. Galvalume is also the material of choice for a wide range of agricultural buildings. Both plain and prepainted Galvalume are used for agricultural applications such as:

- Quonset/steel arch buildings
- Equipment storage facilities
- Barns for storing harvested crops and feed
- Greenhouse, plant nursery and food processing facilities
- Animal confinement buildings, excluding pig barns

Animal confinement buildings have been identified as very corrosive, due to the types of corrosive gases that are produced during the decomposition of animal waste and the high humidity conditions involved. In confinement buildings that house cattle, poultry or horses, Galvalume can be used and will provide equal or better service life than galvanized steel with proper waste management, ventilation, insulation and building design.

There are a few applications for which Galvalume (plain or prepainted) is not recommended and should not be used. These include bulk chemical fertilizer (potash) storage buildings, particularly in relatively humid regions, and pig barns. The environment in animal confinement buildings for pigs has been identified as severely corrosive for metals and is especially detrimental to Galvalume.

If building products made from Galvalume steel are intended to be used in unusually corrosive environments, please contact your ArcelorMittal Technical Service Representative for advice.

ALUMINUM AND PRESSURE-TREATED LUMBER

Since the beginning of 2004, new pressure-treated lumber with ACQ replaces the old arsenic-laced pressure-treated lumber which was abandoned voluntarily by the Canadian manufacturers following agreements concluded with different government and environment organizations. Some manufacturers now offer the same quality and same longevity as the old treated lumber. The disadvantage of this new treated lumber relates to the corrosion of materials in direct contact.

When two metals are in direct contact in a moist environment, the less noble one (anode) will corrode. The second one (cathode) remains partly protected from corrosion. This phenomenon is called **galvanic corrosion** or galvanic cell effect. The further apart two metals on the galvanic scale, the higher the speed and importance of corrosion will be.

Since copper and aluminum are very distant on the galvanic scale, galvanic corrosion is at high risk. Indeed, the presence of copper in great quantity accelerates the corrosion of aluminum. **Therefore, you should not install aluminum materials on ACQ pressure-treated lumber to avoid damage due to premature corrosion.**

The degree of corrosion is dependant of many various factors. Some of the more relevant are, among others, salt, water, moisture content of wood, atmosphere and the presence of other melts such as steel or mechanically galvanized screws.

¹ArcelorMittal Dofasco. [2016]. Galvalume™ The Steel Product of Choice for Superior Corrosion Resistance [Brochure]. Hamilton, ON : ArcelorMittal Dofasco.

IMPORTANT NOTICE

ROOFING AND SIDING SCREWS AND PRESSURE-TREATED LUMBER

Due to the high copper content in new ACQ pressure-treated lumber, galvanized or prepainted galvanized screws should not be used to fasten siding on this type of treated lumber. Copper dangerously accelerates premature corrosion. Please consult the treated lumber manufacturer for recommended fasteners.

RETURN POLICY

All products manufactured on demand to customer specifications can not be cancelled, returned or refunded.

In case of a customer order error, a 20% (minimum of \$75) handling charge will be applied.

Return goods must be in good condition (no damage on product or packaging) and properly protected and packaged for the return.

Any claim must be made within 30 days of receipt of the goods, otherwise Duchesne reserves the right to refuse it.

LARGE FLAT STEEL PANELS AND OIL CANNING

All large flat steel panels, including LCD 12 with or without groove, Authentik, Classik and Majestik with or without rib(s) or striations, are subject to oil canning due to the raw material's tolerance to physical constraints. Oil canning may become more pronounced as a result of thermal expansion or incorrect installation of the panels. Because oil canning is related directly to the nature of the raw material itself, and not to how the panels are manufactured, Duchesne et Fils Itée shall not be held responsible for any oil canning of LCD 12 panels with or without groove, Authentik, Classik and Majestik panels, with or without rib(s) or striations. Consequently, no exchange, refund, return or claim will be authorized should oil canning occur.

Duchesne et Fils Itée encourages you to take measures related to panel specifications and installation to help prevent oil canning. These measures are detailed in the important notice document specific to each concealed fasteners steel profile.

Please read the Disclaimer of Responsibility that will be given to you when ordering these profiles. Fill out the form included with the disclaimer to indicate your acceptance of the terms and conditions and adherence in the scope of a project with LCD 12, Authentik, Classik or Majestik profile.

Contact your Duchesne representative for further information.

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

IMPORTANT NOTICE

INSTALLATION REQUIREMENTS ON A ROOF: AUTHENTIK™, CLASSIK™, MAJESTIK™

Minimum roof slope required

When used on a roof, Duchesne concealed fasteners steel profiles must be installed on a minimum roof slope of 3/12. In the case where a sealant is applied on site, the required minimum roof slope is 1.5/12 for the Authentik and Classik profiles and 2/12 for the Majestik profile. It is the responsibility of the installer to ensure the tightness of the installation with sealant.

Solid substrate

All Duchesne concealed fasteners steel profiles used on a roof must be installed on a solid substrate.

Roofing underlayment required

A roofing underlayment is required for any roof using the Authentik, Classik and Majestik profiles.


Please refer to the installation guide for more information about the installation of Duchesne concealed fasteners steel profiles.

SPANGLES

Due to the galvanizing process, the spangles' appearance may vary from one coil to another; this does not affect the quality of the zinc coating.

AVAILABLE COLOURS

PERSPECTRA PLUS SERIES™

							
783 BRIGHT WHITE	120 ICE WHITE*	695 CAMBRIDGE WHITE*	317 WHITE*	273 BONE WHITE*	114 GREY*	730 REGENT GREY*	017 COAL GREY*
							
314 DEEP GREY	641 SABLE	117 COBALT	260 SLATE BLUE	330 HERON BLUE	726 REFLEX BLUE	790 ROYAL BLUE	806 SOLAR YELLOW*
							
803 AUTUMN*	797 ORANGE*	386 BRIGHT RED*	250 RED	259 TILE RED*	014 CLAY BROWN*	119 BISCUIT*	315 TAN*
							
228 METRO BROWN	326 COCOA BROWN	229 DARK BROWN	262 BLACK	306 CHARCOAL*	659 GREYBERRY*	305 STONE GREY*	694 ATRIUM GREEN
							
307 DARK GREEN	329 GREEN						



*Cool roof colours with energy efficient performances in compliance with LEED® Green Building System Requirements - Heat Island Effect: Roof.

LEED® is a trademark registered by the U.S. Green Building Council.

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES


AVAILABLE COLOURS

SEE AVAILABLE COLORS ON THE PREVIOUS PAGE

WRINKLE - TEXTURED SMP SERIES




QC9822
EBONY



QC9821
GRAPHITE

BAYCOAT® METALIC SERIE



QC9789
RIGEL-2

POLYURETHANE SERIES



7500
METALLIC GREY*

PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™

The Perspectra Plus Series™ is the first choice for a wide range of applications in steel construction systems, architectural panels, commercial sector, institutional and industrial projects, and agricultural buildings.

Perspectra Plus Series™ uses state-of-the-art silicone-modified polyester (SPM) technology and a resin base that provides enhanced hold. This results in greater resistance to color degradation caused by wear, a better retention of gloss and maximum scratch resistance.

Perspectra Plus Series™ is a trademark filed by Baycoat in Canada and the United States.

PREPAINTED FINISHES - WRINKLE - TEXTURED SMP SERIES

Wrinkle is a highly durable, textured paint system that brings differentiation and originality to residential, commercial and architectural buildings. Typical applications include roof panels, wall panels and other building accessories. The textured coating gives building products a consistent attractive appearance. It offers superior weatherability with a high resistance to chalking, fading and scratching. It has exceptional colour and gloss retention and outstanding colour consistency.

REPAINTED FINISHES - METALLIC SERIES - PVDF

Metallic Paint systems are often used in prestigious applications where there is a desire for a striking metallic finish. Typical end-uses can include storefronts, buildings panels, curtain walls and other building features.

Metallic PVPFs are a high end paint system ideal for use in roofing and cladding applications.

PREPAINTED FINISHES - POLYURETHANE SERIES

The Polyurethane series is designed for wall applications (vertical) and roofing (non- vertical) requirements in terms of aesthetics and performance.

The paint system consists of a primer coat and an overcoat of Polyurethane which, when combined, provide a resistant and very flexible paint system.

This technology is not recommended when the steel panels are used in hostile environments where corrosion protection is the key issue.

AVAILABLE COLOURS

POLYESTER SERIES




5712
INTERIOR WHITE

NATURAL FINISHES



011
GALVANIZED*



023
GALVALUME PLUS*

PREPAINTED FINISHES - POLYESTER SERIES

This polyester paint system is designed for indoor applications only.

NATURAL FINISHES

Unpainted Galvanized and Galvalume Plus™ natural finishes feature a silver metallic shade and give a more traditional look to any building. Note that Galvanized and Galvalume Plus finishes are not architectural finishes. The color and uniformity of these finishes may vary over time. These finishes should be used for projects where performance overrides aesthetics. For any project where aesthetics is an important factor, it is best to choose a pre-painted finish.

Galvalume Plus™ is the ultimate choice for any non-painted steel application. It has a fine spangle and a slightly glossy surface. It offers increased corrosion protection compared to galvanized steel. It also offers a double protection to cut and exposed edges: zinc provides galvanic protection and aluminum provides an excellent barrier to corrosion. To achieve this finish, the steel is coated with an aluminum-zinc alloy applied on both sides of the steel by a hot immersion coating process. A transparent organic coating is then applied to prevent staining during storage and handling, which keeps the new looking appearance longer. This organic coating also allows to profile without any other lubricant. The Galvalume Plus finish meets the AZM150 (AZ50) or AZM180 (AZ60) designations.

Galvanized natural finish provides excellent corrosion resistance. It is obtained by continuous dipping of the steel in a zinc alloy. It meets the G90 (Z275) designation, meaning 90 oz. of zinc at 100 sq. ft. of steel (275 g. of zinc per square meter of steel).

Galvalume Plus™ is a registered trademark of ArcelorMittal Dofasco.



*Cool roof colours with energy efficient performances in compliance with LEED® Green Building System Requirements - Heat Island Effect: Roof.

LEED® is a trademark registered by the U.S. Green Building Council.

COLOUR AVAILABILITY CHART BY PROFILE AND STEEL THICKNESS

THE AVAILABILITY CHART PRESENTED IN THIS CATALOGUE IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE REFER TO THE AVAILABILITY CHART PRESENTED ON OUR WEB SITE WWW.DUCHESNE.CA OR TO OUR SALES DEPARTMENT.

PROFILES		TR 5 TR 7			TR 80	TR 9 LC 15 LC 17 LC 19 ⁽¹⁾ LC 23 LC 25 CRG 7/8 - 30.3 ⁽²⁾					TR 11 LC 27 LC 29 CRG 7/8 - 38.6			LCD 6-8 11-12 CLASSIK™	AUTHENTIK™ CLASSIK™ MAJESTIK™		
WIDTH-FLAT STEEL GAUGE		36"			41"	42"					51"			17.5"			
		30 JA	28 JA	26 JA	29 JA	30 JA	29 JA	28 JA	26 JA	24 JA	26 JA	24 JA	22 JA	22 JA	26 JA	24 JA	22 JA
NATURAL FINISHES																	
GALVANISÉ Z275 (G90)		•	•	•	•	•		•	•	•	•				•		
GALVALUME PLUS AZM150 (AZ50)		•	•	•	•	•		•	•		•				•		
GALVALUME PLUS AZM180 (AZ60)												•				•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™																	
QC 014	CLAY BROWN							•							•		
QC 017	COAL GREY							•			•				•		
QC 114	GREY							•									
QC 117	COBALT							•									
QC 119	BISCUIT							•									
QC 120	ICE WHITE					•			•		•				•		
QC 228	METRO BROWN		•														
QC 229	DARK BROWN	•			•	•		•	•		•				•		
QC 797	ORANGE							•									
QC 250	RED	•			•			•			•				•		
QC 259	TILE RED								•								
QC 260	SLATE BLUE	•			•			•			•				•		
QC 262	BLACK	•	•		•	•		•	•		•	•		•	•	•	
QC 273	BONE WHITE	•	•		•	•		•			•			•	•		
QC 803	AUTUMN ⁽¹⁰⁾							•									
QC 305	STONE GREY	•			•			•			•		•	•	•		
QC 306	CHARCOAL	•	•		•	•		•	•		•	•	•	•	•	•	•(6)
QC 307	DARK GREEN	•	•		•			•	•								
QC 314	DEEP GREY				•						•			•	•		
QC 315	TAN				•			•								•	

COLOUR AVAILABILITY CHART BY PROFILE AND STEEL THICKNESS

THE AVAILABILITY CHART PRESENTED IN THIS CATALOGUE IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE REFER TO THE AVAILABILITY CHART PRESENTED ON OUR WEB SITE WWW.DUCHESNE.CA OR TO OUR SALES DEPARTMENT.

PROFILES				TR 5 TR 7			TR 80	TR 9 LC 15 LC 17 LC 19 ⁽¹⁾ LC 23 LC 25 CRG 7/8 - 30.3 ⁽²⁾					TR 11 LC 27 LC 29 CRG 7/8 - 38.6			LCD 6-8 11-12 CLASSIK ^{MC}	AUTHENTIK ^{MC} CLASSIK ^{MC} MAJESTIK ^{MC}		
WIDTH-FLAT STEEL GAUGE				36"			41"	42"					51"			17.5"			
				30 JA	28 JA	26 JA	29 JA	30 JA	29 JA	28 JA	26 JA	24 JA	26 JA	24 JA	22 JA	22 JA	26 JA	24 JA	22 JA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™																			
QC 317	WHITE	•	•		•	•		•	•		•	•		•	•	•			
QC 326	COCOA BROWN	•			•			•											
QC 329	GREEN	•			•			•											
QC 330	HERON BLUE	•				•					•				•				
QC 386	BRIGHT RED	•	•		•			•				•				•			
QC 641	SABLE							•											
QC 659	GREYBERRY							•											
QC 806	SOLAR YELLOW							•											
QC 694	ATRIUM GREEN							•											
QC 695	CAMBRIDGE WHITE										•	•		•	•				
QC 726	REFLEX BLUE							•											
QC 730	REGENT GREY	•				•		•	•(9)		•			•	•				
QC 783	BRIGHT WHITE										•			•	•				
QC 790	ROYAL BLUE	•			•			•											
PREPAINTED FINISHES - GRANITE® DEEP MAT																			
QC 60035	GRAPHITE GREY													•(9)					
QC 60039	JET BLACK													•(9)					
WRINKLE - TEXTURED SMP SERIES																			
QC 9822	EBONY				•						•				•				
QC 9821	GRAPHITE				•						•				•				
PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®																			
QC 9740	CARBON													•					
QC 9789	RIGEL-2										•			•	•				
PREPAINTED FINISHES - POLYURETHANE SERIES																			
QC 7500	METALLIC GREY										•	•		•	•	•			
PREPAINTED FINISHES - POLYESTER SERIES																			
QC 5712	INTERIOR WHITE	•(7)			•		•(4)	•	•										

(1) LC 19 profile available only in 24, 26 and 28 GA.

(2) CRG 7/8 profile not available in 30 GA, 28 GA min.

(3) Available in CRG 7/8 33.1 only. For profile LC 27, please check availability with our customer service department. Not available in other profiles.

(4) Available in LC23 only.

(6) Available in Authentik and Classik only.

(7) Available in TR 5 and TR 7 only.

(8) Available in Authentik Nail strip 16" and Classik 20" only.

(9) Discontinued product. Available while quantities last. Please verify availability.

(10) Colour in transition. Please verify availability.

To confirm colour availability or to inquire about colour / gauge options not listed please contact your Duchesne et Fils Ltée representative.

For details, load tables or product brochures, please visit www.duchesne.ca

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

STEEL PROFILES FOR ROOFING



WITH STATE-OF-THE-ART EQUIPMENT, SOME OF THE MOST MODERN FACILITIES IN NORTH AMERICA AND AN EXPERIENCED TEAM, DUCHESNE PRODUCES STEEL ROOFING PRODUCTS IN LINE WITH CURRENT MARKET TRENDS TO MEET THE NEEDS OF CONSUMERS, RETAILERS AND CONSTRUCTION PROFESSIONALS ACROSS EASTERN CANADA.

DISTINCTIVE AND CUSTOMIZABLE STYLE

- 5 steel roofing models that enhance the architectural style of any building
- Unique range of colours available in several gauges and easily matching Duchesne complementary exterior siding, trims and soffits, thanks to the **My Colour Universe®** system

PEACE OF MIND

- 3 times more durable than traditional asphalt shingle roofs
- Excellent protection against water infiltration
- Minimal maintenance

ECONOMICAL

- Visible fasteners save you time and money
- Several colours, known as cool roof colours, offer energy-efficient performances, particularly in summer, by keeping buildings cool

TR 5




- GOOD PROTECTION AGAINST WATER INFILTRATION
- ATTRACTIVE APPEARANCE
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

TR 7



- THE ECONOMICAL CHOICE
- ROBUST
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

TR 9

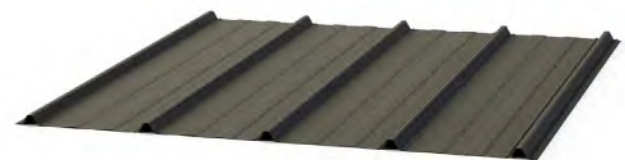

- ATTRACTIVE APPEARANCE
- GOOD PROTECTION AGAINST WATER INFILTRATION
- ROBUST, DURABLE AND PRACTICALLY MAINTENANCE-FREE

TR 80



- A MODEL OF STRENGTH
- MORE WATERTIGHT
- DURABLE AND PRACTICALLY MAINTENANCE-FREE
- ECONOMICAL

TR 11



- ATTRACTIVE APPEARANCE
- GOOD PROTECTION AGAINST WATER INFILTRATION
- DURABLE AND PRACTICALLY MAINTENANCE-FREE


residential agricultural commercial industrial




STEEL PROFILE TR 5

CODE 10005


residential agricultural

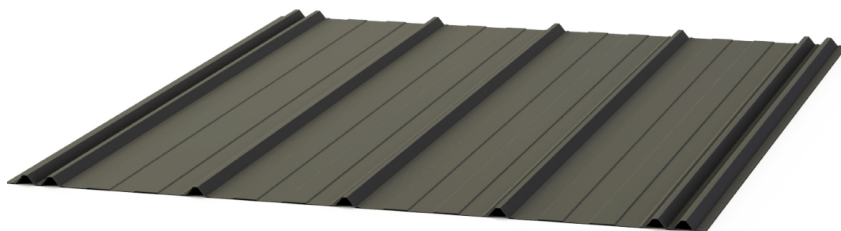

Product use	Roofing and Siding
Width before forming	36" (914 mm)
Width after forming	30" (762 mm)
Available gauges	25 (AL), 26, 28, 30
Height of the rib	1/2" (13 mm)
Min. length	24"



➔ Arrow indicates the colour side.




MOULDINGS



10' COVERING PIECE (3.05 m)

MOULDINGS FOR TR 5


RIDGE - HIP CAP - 158




FLASHING - 318 OR - 408



RIDGE CAP - 134



STARTER - 142



ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 30" (762 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA
NATURAL FINISHES			
GALVANIZED Z275 (G90)	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 228 METRO BROWN		•	
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•	•	
QC 305 STONE GREY	•		
QC 306 CHARCOAL	•	•	
QC 307 DARK GREEN	•	•	
QC 317 WHITE	•	•	
QC 326 COCOA BROWN	•		
QC 329 GREEN	•		
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED	•	•	
QC 730 REGENT GREY	•		
QC 790 ROYAL BLUE	•		
PREPAINTED FINISHES - POLYESTER SERIES			
QC 5712 INTERIOR WHITE	•		

(9) Discontinued product. Available while quantities last. Please verify availability.

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA


STEEL PROFILE TR 7

CODE 10007


residential agricultural



Product use	Roofing
Width before forming	36" (914 mm)
Width after forming	32" (813 mm)
Available gauges	25 (A), 26, 28, 30
Height of the rib	1/2" (13 mm)
Min. length	24"



➔ Arrow indicates the colour side.




MOULDINGS



10' COVERING PIECE (3.05 m)

MOULDINGS FOR TR 7


RIDGE - HIP CAP - 158




FLASHING - 318 OR - 408



RIDGE CAP - 134



STARTER - 142




ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 44,75" (1 137 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA
NATURAL FINISHES			
GALVANIZED Z275 (G90)	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 228 METRO BROWN		•	
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•	•	
QC 305 STONE GREY	•		
QC 306 CHARCOAL	•	•	
QC 307 DARK GREEN	•	•	
QC 317 WHITE	•	•	
QC 326 COCOA BROWN	•		
QC 329 GREEN	•		
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED	•	•	
QC 730 REGENT GREY	•		
QC 790 ROYAL BLUE	•		
PREPAINTED FINISHES - POLYESTER SERIES			
QC 5712 INTERIOR WHITE	•		


(9) Discontinued product. Available while quantities last. Please verify availability.

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA


STEEL PROFILE TR 9

CODE 10009


residential

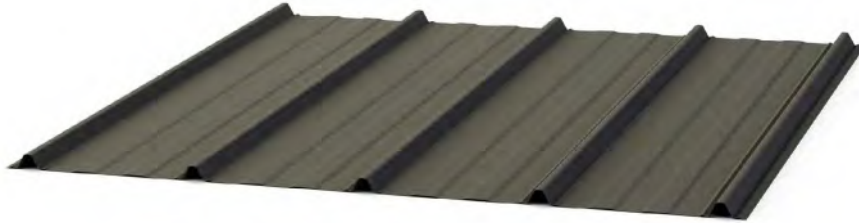

Product use	Roofing
Width before forming	42" (1067 mm)
Width after forming	35.4" (900 mm)
Available gauges	24, 26, 28, 30
Height of the rib	3/4" (19 mm)
Min. length	24"



➔ Arrow indicates the colour side.




MOULDINGS


10' COVERING PIECE (3.05 m)

MOULDINGS FOR TR 9


RIDGE - HIP CAP - 156



RIDGE CAP - 134



FLASHING - 718




ACCESSORIES

FOAM CLOSURE STRIP

NON-VENTED

Length: 35.4" (900 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

VENTED

Length: 35.4" (900 mm)
Width: 1.5" (38 mm)



OVER the sheet

Ventilation
of 4.5 sq.in.
per linear
foot

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA	24 GA
NATURAL FINISHES				
GALVANIZED Z275 (G90)	•	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 014 CLAY BROWN		•		
QC 017 COAL GREY		•		
QC 114 GREY		•		
QC 117 COBALT		•		
QC 119 BISCUIT		•		
QC 120 ICE WHITE	•		•	
QC 229 DARK BROWN	•	•	•	
QC 797 ORANGE (10)		•		
QC 250 RED (10)		•		
QC 259 TILE RED			•	
QC 260 SLATE BLUE		•		
QC 262 BLACK	•	•	•	
QC 273 BONE WHITE	•	•		
QC 803 AUTUMN (10)		•		
QC 305 STONE GREY		•		

GAUGE	30 GA	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 306 CHARCOAL	•	•	•	
QC 307 DARK GREEN		•	•	
QC 315 TAN		•	•	
QC 317 WHITE	•	•	•	
QC 326 COCOA BROWN		•		
QC 329 GREEN		•		
QC 330 HERON BLUE	•			
QC 386 BRIGHT RED		•		
QC 641 SABLE		•		
QC 659 GREYBERRY		•		
QC 806 SOLAR YELLOW		•		
QC 694 ATRIUM GREEN		•		
QC 726 REFLEX BLUE		•		
QC 730 REGENT GREY	•	•	•(9)	
QC 790 ROYAL BLUE		•		
PREPAINTED FINISHES - POLYESTER SERIES				
QC 5712 INTERIOR WHITE		•	•	

(9) Discontinued product. Available while quantities last. Please verify availability.
 (10) Colour in transition. Please verify availability.


STEEL PROFILE TR 80

CODE 10080


residential agricultural



Product use	Roofing
Width before forming	41" (1041 mm)
Width after forming	36" (914 mm)
Available gauges	29
Height of the rib	1 1/16" (17 mm)
Min. length	24"



➔ Arrow indicates the colour side.

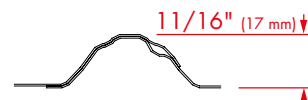

NOTE TO INSTALLERS


Made out of grade 80 steel, the TR 80 offers a superior rigidity and load capacity when compared to other grade 33 steel profiles. It is ideal for roofs with large surfaces such as those of agricultural buildings. Multi-slope roofs present a higher risk of damage for this profile. The rigidity of the TR 80 steel reduces the absorption of the shock caused by falling ice which induces the ribs profile to rupture at the moment of the impact. For these reasons, it is not recommended to use this profile on multi-slope roofs.

MOULDINGS


10' COVERING PIECE (3.05 m)

MOULDINGS FOR TR 80


RIDGE - HIP CAP - 156

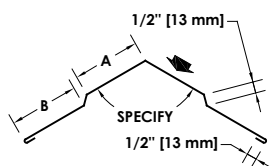

RIDGE CAP - 134



FLASHING - 718



ACCESSORIES


FOAM CLOSURE STRIP

NON-VENTED

Length: 36" (914 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

VENTED

Length: 36" (914 mm)
Width: 1.5" (38 mm)



OVER the sheet

Ventilation
of 4.5 sq.in.
per linear
foot

COLOUR CHART

GAUGE		29 GA
NATURAL FINISHES		
GALVANIZED Z275 (G90)		•
GALVALUME PLUS AZM150 (AZ50)		•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™		
QC 229	DARK BROWN	•
QC 250	RED	•
QC 260	SLATE BLUE	•
QC 262	BLACK	•
QC 273	BONE WHITE	•
QC 305	STONE GREY	•
QC 306	CHARCOAL	•
QC 307	DARK GREEN	•
QC 315	TAN	•
QC 317	WHITE	•
QC 326	COCOA BROWN	•
QC 329	GREEN	•
QC 386	BRIGHT RED	•
QC 790	ROYAL BLUE	•
WRINKLE - TEXTURED SMP SERIES		
QC 9822	EBONY	•
QC 9821	GRAPHITE	•
PREPAINTED FINISHES - POLYESTER SERIES		
QC 5712	INTERIOR WHITE	•

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES



TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA

STEEL PROFILE TR 11


CODE 10011

commercial

industrial

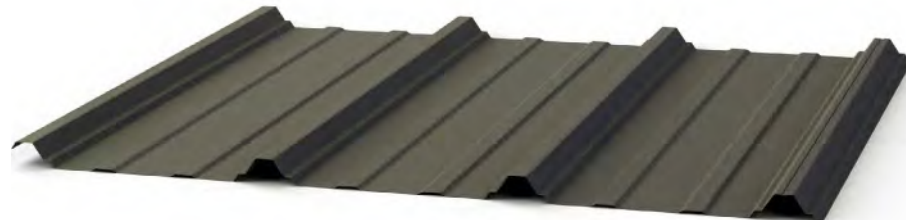

➔ Arrow indicates the colour side.



Product use	Roofing
Width before forming	51" (1292 mm)
Width after forming	42.91" (1090 mm)
Available gauges	22, 24, 26
Height of the rib	1 3/8" (35 mm)
Min. length	24"

ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 42.91" (1090 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

COLOUR CHART

GAUGE	26 GA	24 GA	22 GA
NATURAL FINISHES			
GALVANIZED Z275 (G90)	•		
GALVALUME PLUS AZM150 (AZ50)	•		
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017 COAL GREY	•		
QC 120 ICE WHITE	•		
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 305 STONE GREY	•		•
QC 306 CHARCOAL	•	•	•
QC 314 DEEP GREY	•		
QC 315 TAN	•		

GAUGE	26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 317 WHITE	•	•	
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED		•	
QC 695 CAMBRIDGE WHITE	•		
QC 730 REGENT GREY	•		
QC 783 BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500 METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821 GRAPHITE	•		
QC 9822 EBONY	•		

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA

STEEL PROFILES FOR SIDING



WITH STATE-OF-THE-ART EQUIPMENT, SOME OF THE MOST MODERN FACILITIES IN NORTH AMERICA AND AN EXPERIENCED TEAM, DUCHESNE PRODUCES STEEL SIDING PRODUCTS IN LINE WITH CURRENT MARKET TRENDS TO MEET THE NEEDS OF CONSUMERS, RETAILERS AND CONSTRUCTION PROFESSIONALS ACROSS EASTERN CANADA.

DISTINCTIVE STYLE AND DURABILITY

- Over 13 steel profile models for wall applications give a distinctive style and durability to any type of building
- Unique range of colours available in several gauges and easily matching Duchesne complementary exterior siding, trims and soffits, thanks to the **My Colour Universe®** system


PEACE OF MIND

- Undeniable durability and robustness
- Paint system resistant to fading, chalking and chipping
- Minimal maintenance

ECONOMICAL


- Visible fasteners save you time and money

LC 15

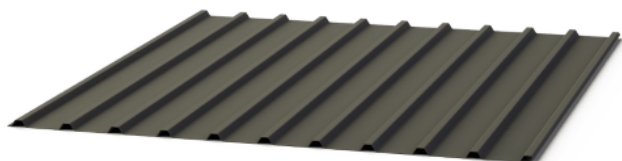


- ATTRACTIVE APPEARANCE
- ECONOMICAL
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 17

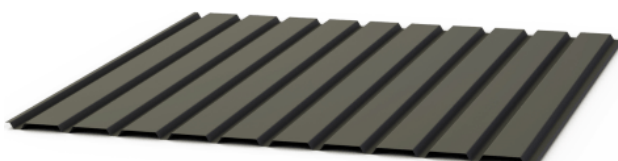

- ATTRACTIVE APPEARANCE
- ECONOMICAL
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 19

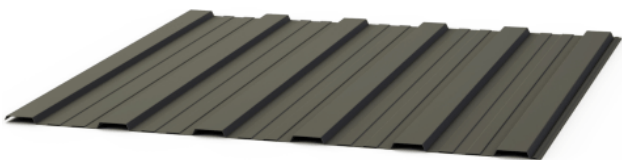



- A VINTAGE LOOK
- ECONOMIC AND EASY TO INSTALL
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 23





- CLASSIC AND VERSATILE
- ECONOMIC AND EASY TO INSTALL
- ROBUST, DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 27 - LC 27 RG

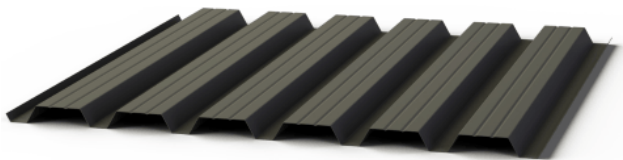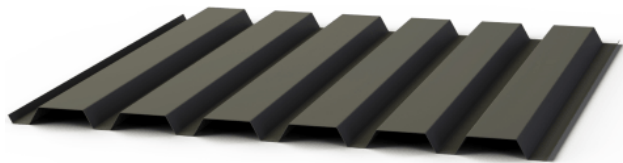


- ELEGANT AND MODERN
- ECONOMICAL
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 29 - LC 29 RG

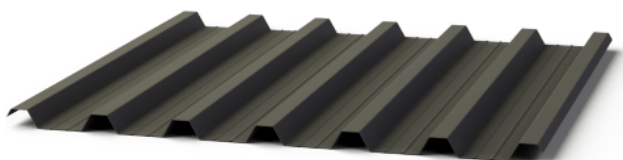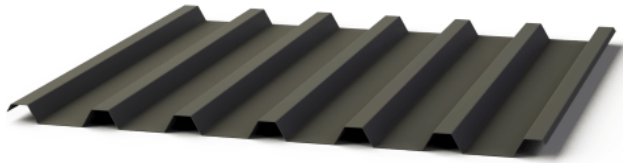

- VERSATILE
- ECONOMICAL
- ROBUST, DURABLE AND PRACTICALLY MAINTENANCE-FREE

LC 25

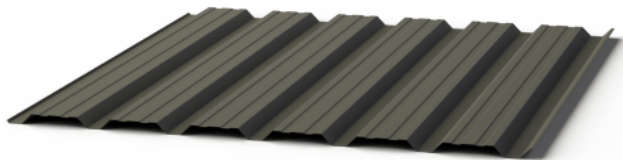

- A BEAUTIFUL ALTERNATIVE!
- ECONOMIC AND EASY TO INSTALL
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

LCD 6-8-11-12 WITH OR WITHOUT GROOVE



- AVANT-GARDE ARCHITECTURAL STYLE
- ASSISTING YOUR CREATIVITY
- VERSATILE COMBINATION
- DURABLE AND PRACTICALLY MAINTENANCE-FREE

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

residential



agricultural



commercial





industrial



STEEL PROFILE LC 15


CODE 10015

residential industrial agricultural

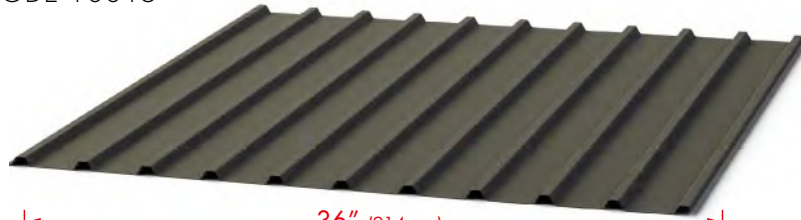

→ Arrow indicates the colour side.

Product use	Siding
Width before forming	42" (1067 mm)
Width after forming	36" (914 mm)
Available gauges	24, 26, 28, 30
Height of the rib	1/2" (13 mm)
Min. length	24"




ACCESSORIES


FOAM CLOSURE STRIP NON-VENTED

Length: 47" (1194 mm)

Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA	24 GA
GALVANIZED Z275 (G90)	•	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 014 CLAY BROWN		•		
QC 017 COAL GREY		•		
QC 114 GREY		•		
QC 117 COBALT		•		
QC 119 BISCUIT		•		
QC 120 ICE WHITE	•		•	
QC 229 DARK BROWN	•	•	•	
QC 797 ORANGE		•		
QC 250 RED		•		
QC 259 TILE RED	•		•	
QC 260 SLATE BLUE		•		
QC 262 BLACK	•	•	•	
QC 273 BONE WHITE	•	•		
QC 803 AUTUMN (10)		•		
QC 305 STONE GREY		•		

GAUGE	30 GA	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 306 CHARCOAL	•	•	•	
QC 307 DARK GREEN		•	•	
QC 315 TAN		•	•	
QC 317 WHITE	•	•	•	
QC 326 COCOA BROWN		•		
QC 329 GREEN		•		
QC 330 HERON BLUE	•			
QC 386 BRIGHT RED		•		
QC 641 SABLE		•		
QC 659 GREYBERRY		•		
QC 806 SOLAR YELLOW		•		
QC 694 ATRIUM GREEN		•		
QC 726 REFLEX BLUE		•		
QC 730 REGENT GREY	•	•	•(9)	
QC 790 ROYAL BLUE		•		
PREPAINTED FINISHES - POLYESTER SERIES				
QC 5712 INTERIOR WHITE		•	•	

(9) Discontinued product. Available while quantities last. Please verify availability.
(10) Colour in transition. Please verify availability.

STEEL PROFILE LC 17

CODE 10017

residential industrial agricultural



GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS



MOULDINGS

ACCESSORIES

FLAT STEEL


METAL
PRODUCTS

SERVICES

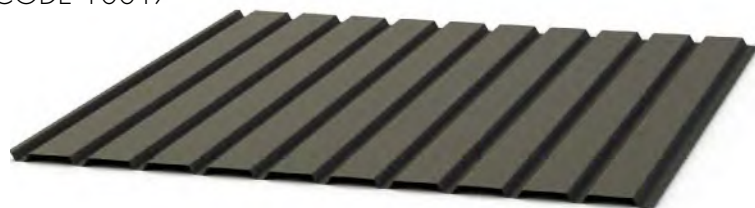

➔ Arrow indicates the colour side.

Product use	Siding
Width before forming	42" (1067 mm)
Width after forming	36" (914 mm)
Available gauges	24, 26, 28, 30
Height of the rib	1/2" (13 mm)
Min. length	24"



ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 47" (1194 mm)

Width: 1" (25 mm)

OVER the sheet

UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA	24 GA
GALVANIZED Z275 (G90)	•	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•	•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 014 CLAY BROWN		•		
QC 017 COAL GREY		•		
QC 114 GREY		•		
QC 117 COBALT		•		
QC 119 BISCUIT		•		
QC 120 ICE WHITE	•		•	
QC 229 DARK BROWN	•	•	•	
QC 797 ORANGE		•		
QC 250 RED	•	•		
QC 259 TILE RED			•	
QC 260 SLATE BLUE		•		
QC 262 BLACK	•	•	•	
QC 273 BONE WHITE	•	•		
QC 803 AUTUMN (10)		•		
QC 305 STONE GREY		•		

GAUGE	30 GA	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 306 CHARCOAL	•	•	•	
QC 307 DARK GREEN		•	•	
QC 315 TAN		•	•	
QC 317 WHITE	•	•	•	
QC 326 COCOA BROWN		•		
QC 329 GREEN		•		
QC 330 HERON BLUE	•			
QC 386 BRIGHT RED		•		
QC 641 SABLE		•		
QC 659 GREYBERRY		•		
QC 806 SOLAR YELLOW		•		
QC 694 ATRIUM GREEN		•		
QC 726 REFLEX BLUE		•		
QC 730 REGENT GREY	•	•	•(9)	
QC 790 ROYAL BLUE		•		
PREPAINTED FINISHES - POLYESTER SERIES				
QC 5712 INTERIOR WHITE		•	•	


(9) Discontinued product. Available while quantities last. Please verify availability.

(10) Colour in transition. Please verify availability.

STEEL PROFILE LC 19


CODE 10019

residential commercial industrial



→ Arrow indicates the colour side.

Product use	Siding
Width before forming	42" (1067 mm)
Width after forming	36" (914 mm)
Available gauges	24, 26, 28
Height of the rib	1/2" (13 mm)
Min. length	24"



ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 43.2" (1097 mm)

Width: 1" (25 mm)

OVER the sheet

UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	28 GA	26 GA	24 GA
GALVANIZED Z275 (G90)	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 014 CLAY BROWN	•		
QC 017 COAL GREY	•		
QC 114 GREY	•		
QC 117 COBALT	•		
QC 119 BISCUIT	•		
QC 120 ICE WHITE		•	
QC 229 DARK BROWN	•	•	
QC 797 ORANGE	•		
QC 250 RED	•		
QC 259 TILE RED		•	
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 803 AUTUMN (10)	•		
QC 305 STONE GREY	•		

GAUGE	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 306 CHARCOAL	•	•	
QC 307 DARK GREEN	•	•	
QC 315 TAN	•	•	
QC 317 WHITE	•	•	
QC 326 COCOA BROWN	•		
QC 329 GREEN	•		
QC 330 HERON BLUE			
QC 386 BRIGHT RED	•		
QC 641 SABLE	•		
QC 659 GREYBERRY	•		
QC 806 SOLAR YELLOW	•		
QC 694 ATRIUM GREEN	•		
QC 726 REFLEX BLUE	•		
QC 730 REGENT GREY	•	•(9)	
QC 790 ROYAL BLUE	•		
PREPAINTED FINISHES - POLYESTER SERIES			
QC 5712 INTERIOR WHITE	•	•	

(9) Discontinued product. Available while quantities last. Please verify availability.

(10) Colour in transition. Please verify availability.

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE. FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA

STEEL PROFILE LC 23

CODE 10023

residential



agricultural



commercial



industrial



GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS


MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

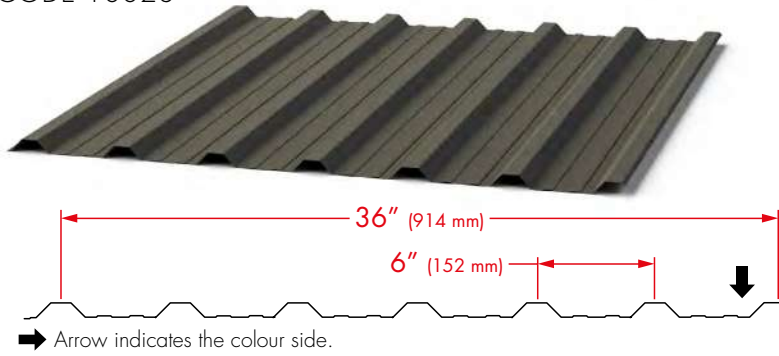

Product use	Siding
Width before forming	42" (1067 mm)
Width after forming	36" (914 mm)
Available gauges	24, 26, 28, 30
Height of the rib	3/4" (19 mm)
Min. length	24"

ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 42" (1067 mm)

Width: 1" (25 mm)

OVER the sheet

UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	30 GA	29 GA	28 GA	26 GA	24 GA
NATURAL FINISHES					
GALVANIZED Z275 (G90)	•		•	•	•
GALVALUME PLUS AZM150 (AZ50)	•		•	•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™					
QC 014 CLAY BROWN			•		
QC 017 COAL GREY			•		
QC 114 GREY			•		
QC 117 COBALT			•		
QC 119 BISCUIT			•		
QC 120 ICE WHITE	•			•	
QC 229 DARK BROWN	•		•	•	
QC 234 ORANGE			•		
QC 250 RED	•		•		
QC 259 TILE RED				•	
QC 260 SLATE BLUE			•		
QC 262 BLACK	•		•	•	
QC 273 BONE WHITE	•		•		
QC 803 AUTUMN (10)			•		
QC 305 STONE GREY			•		


GAUGE	30 GA	29 GA	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™					
QC 306 CHARCOAL	•		•	•	
QC 307 DARK GREEN			•	•	
QC 315 TAN			•	•	
QC 317 WHITE	•		•	•	
QC 326 COCOA BROWN			•		
QC 329 GREEN			•		
QC 330 HERON BLUE	•				
QC 386 BRIGHT RED			•		
QC 641 SABLE			•		
QC 659 GREYBERRY			•		
QC 806 SOLAR YELLOW			•		
QC 694 ATRIUM GREEN			•		
QC 726 REFLEX BLUE			•		
QC 730 REGENT GREY	•		•	•(9)	
QC 790 ROYAL BLUE			•		
PREPAINTED FINISHES - POLYESTER SERIES					
QC 5712 INTERIOR WHITE		•	•	•	

(9) Discontinued product. Available while quantities last. Please verify availability.
(10) Colour in transition. Please verify availability.

STEEL PROFILE LC 25


CODE 10025

residential commercial industrial

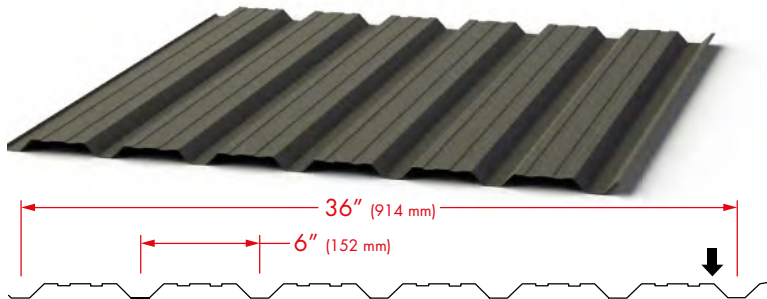

→ Arrow indicates the colour side.

Product use	Siding
Width before forming	42" (1067 mm)
Width after forming	36" (914 mm)
Available gauges	24, 26, 28, 30
Height of the rib	3/4" (19 mm)
Min. length	24"



ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 42" (1067 mm)

Width: 1" (25 mm)

OVER the sheet

UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	30 GA	28 GA	26 GA	24 GA
NATURAL FINISHES				
GALVANIZED Z275 (G90)	•	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	•	•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 014 CLAY BROWN		•		
QC 017 COAL GREY		•		
QC 114 GREY		•		
QC 117 COBALT		•		
QC 119 BISCUIT		•		
QC 120 ICE WHITE	•		•	
QC 229 DARK BROWN	•	•	•	
QC 797 ORANGE		•		
QC 250 RED	•	•		
QC 259 TILE RED			•	
QC 260 SLATE BLUE		•		
QC 262 BLACK	•	•	•	
QC 273 BONE WHITE	•	•		
QC 803 AUTUMN (10)		•		
QC 305 STONE GREY		•		

GAUGE	30 GA	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 306 CHARCOAL	•	•	•	
QC 307 DARK GREEN		•	•	
QC 315 TAN		•	•	
QC 317 WHITE	•	•	•	
QC 326 COCOA BROWN		•		
QC 329 GREEN		•		
QC 330 HERON BLUE	•			
QC 386 BRIGHT RED		•		
QC 641 SABLE		•		
QC 659 GREYBERRY		•		
QC 806 SOLAR YELLOW		•		
QC 694 ATRIUM GREEN		•		
QC 726 REFLEX BLUE		•		
QC 730 REGENT GREY	•	•	•(9)	
QC 790 ROYAL BLUE		•		
PREPAINTED FINISHES - POLYESTER SERIES				
QC 5712 INTERIOR WHITE		•	•	

(9) Discontinued product. Available while quantities last. Please verify availability.

(10) Colour in transition. Please verify availability.

STEEL PROFILE LC 27

CODE 10027

residential industrial



GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS


MOULDINGS

ACCESSORIES


FLAT STEEL

METAL
PRODUCTS

SERVICES



Product use	Siding
Width before forming ¹	51" (1292 mm)
Width after forming ²	39.37" (1000 mm)
Available gauges	22, 24, 26
Height of the rib	1 13/32" (36 mm)
Min. length	24"



¹ Galvalume Plus: 43.875" (1114 mm)
² Galvalume Plus: 32.81" (833 mm)

ACCESSORIES


FOAM CLOSURE STRIP NON-VENTED

Length: 39" (991 mm)

Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	26 GA	24 GA	22 GA
GALVANIZED Z275 (G90)	•		
GALVALUME PLUS AZM150 (AZ50)	•		
GALVALUME PLUS AZM180 (AZ60)		• (1)	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017 COAL GREY	•		
QC 120 ICE WHITE	•		
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 305 STONE GREY	•		•
QC 306 CHARCOAL	•	•	•
QC 314 DEEP GREY	•		
QC 317 WHITE	•	•	


GAUGE	26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED		•	
QC 695 CAMBRIDGE WHITE	•	•	
QC 730 REGENT GREY	•		
QC 783 BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500 METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821 GRAPHITE	•		
QC 9822 EBONY	•		
QC 9798 RIGEL-2	•		

(1) Please check availability with our customer service department.

STEEL PROFILE LC 27 RG


CODE 100271

commercial industrial



→ Arrow indicates the colour side.

Product use	Siding
Width before forming ¹	51" (1292 mm)
Width after forming ²	39.37" (1000 mm)
Available gauges	22, 24, 26
Height of the rib	1 13/32" (36 mm)
Min. length	24"



¹ Galvalume Plus: 43.875" (1114 mm)
² Galvalume Plus: 32.81" (833 mm)

ACCESSORIES


FOAM CLOSURE STRIP NON-VENTED

Length: 39" (991 mm)

Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART

GAUGE	26 GA	24 GA	22 GA
GALVANIZED Z275 (G90)	•		
GALVALUME PLUS AZM150 (AZ50)	•		
GALVALUME PLUS AZM180 (AZ60)		• (1)	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017 COAL GREY	•		
QC 120 ICE WHITE	•		
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 305 STONE GREY	•		•
QC 306 CHARCOAL	•	•	•
QC 314 DEEP GREY	•		
QC 317 WHITE	•	•	



GAUGE	26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED		•	
QC 695 CAMBRIDGE WHITE	•	•	
QC 730 REGENT GREY	•		
QC 783 BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500 METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821 GRAPHITE	•		
QC 9822 EBONY	•		
QC 9798 RIGEL-2	•		

(1) Please check availability with our customer service department.

STEEL PROFILE LC 29


CODE 10029

commercial industrial

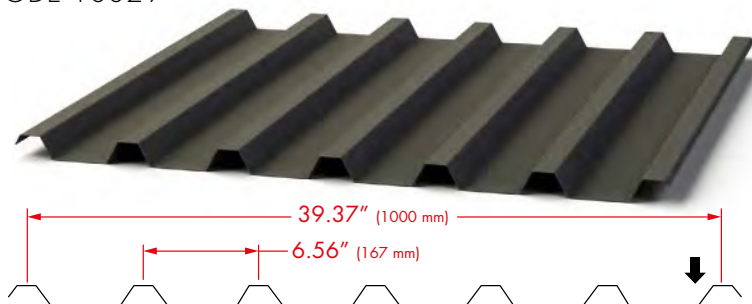

➔ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming ¹	51" (1292 mm)
Width after forming ²	39.37" (1000 mm)
Available gauges	22, 24, 26
Height of the rib	1 13/32" (36 mm)
Min. length	24"



¹ Galvalume Plus: 43.875" (1114 mm)
² Galvalume Plus: 32.81" (833 mm)

ACCESSORIES


FOAM CLOSURE STRIP NON-VENTED

Length: 39" (991 mm)

Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended
to close openings
at the end of
sheets

COLOUR CHART


GAUGE	26 GA	24 GA	22 GA
GALVANIZED Z275 (G90)	•		
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017 COAL GREY	•		
QC 120 ICE WHITE	•		
QC 229 DARK BROWN	•		
QC 250 RED	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 305 STONE GREY	•		•
QC 306 CHARCOAL	•	•	•
QC 314 DEEP GREY	•		
QC 317 WHITE	•	•	

GAUGE	26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED		•	
QC 695 CAMBRIDGE WHITE	•	•	
QC 730 REGENT GREY	•		
QC 783 BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500 METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821 GRAPHITE	•		
QC 9822 EBONY	•		
QC 9798 RIGEL-2	•		

STEEL PROFILE LC 29 RG


CODE 100291

commercial industrial

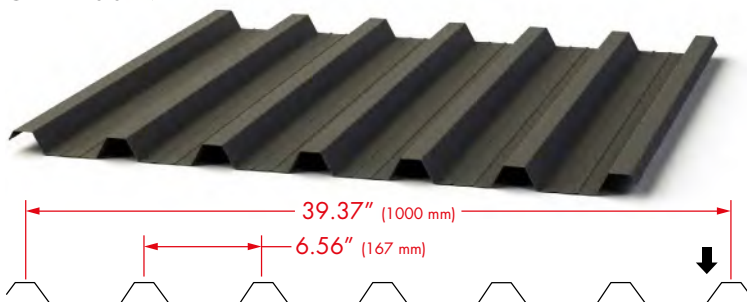

➔ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming ¹	51" (1292 mm)
Width after forming ²	39.37" (1000 mm)
Available gauges	22, 24, 26
Height of the rib	1 13/32" (36 mm)
Min. length	24"



¹ Galvalume Plus: 43.875" (1114 mm)
² Galvalume Plus: 32.81" (833 mm)

ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 39" (991 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended to close openings at the end of sheets

Other compatible universal accessories and mouldings are available. See pages 58 to 92.


COLOUR CHART

GAUGE		26 GA	24 GA	22 GA
GALVANIZED Z275 (G90)		•		
GALVALUME PLUS AZM150 (AZ50)		•		
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 017	COAL GREY	•		
QC 120	ICE WHITE	•		
QC 229	DARK BROWN	•		
QC 250	RED	•		
QC 260	SLATE BLUE	•		
QC 262	BLACK	•	•	
QC 273	BONE WHITE	•		
QC 305	STONE GREY	•		•
QC 306	CHARCOAL	•	•	•
QC 314	DEEP GREY	•		
QC 317	WHITE	•	•	

GAUGE		26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 330	HERON BLUE	•		
QC 386	BRIGHT RED		•	
QC 695	CAMBRIDGE WHITE	•	•	
QC 730	REGENT GREY	•		
QC 783	BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES				
QC 7500	METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES				
QC 9821	GRAPHITE	•		
QC 9822	EBONY	•		
QC 9798	RIGEL-2	•		


STEEL PROFILE LCD 6

WITH (CODE 100061) AND WITHOUT GROOVE (CODE 10006)

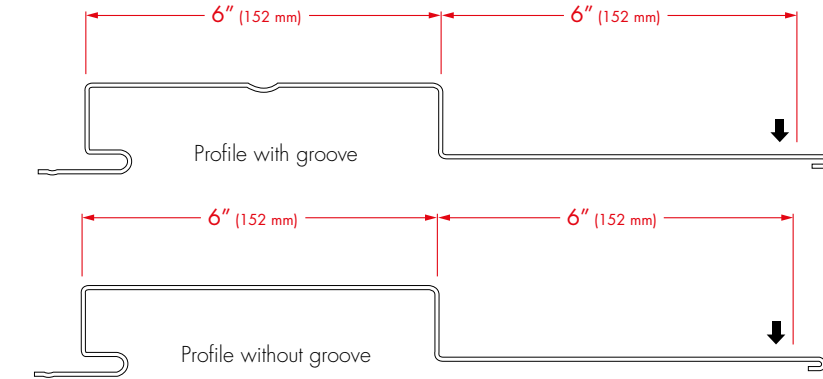

➡ Arrow indicates the colour side.

Product use	Siding
Width before forming	17.5" (445 mm)
Width after forming	12" (305 mm)
Available gauges	22
Height of the rib	1 1/2" (38 mm)
Min. length	4'

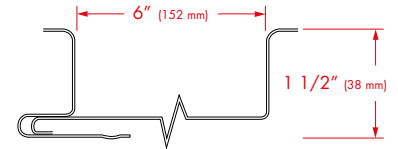


MOULDINGS

10' COVERING PIECE (3.05 m)


MOULDINGS FOR LCD 6

OPENING TRIM




*Specify


"J" TRIM

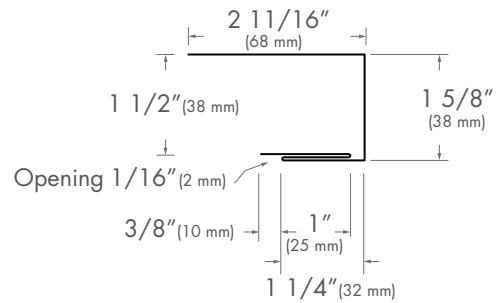

INSIDE CORNER

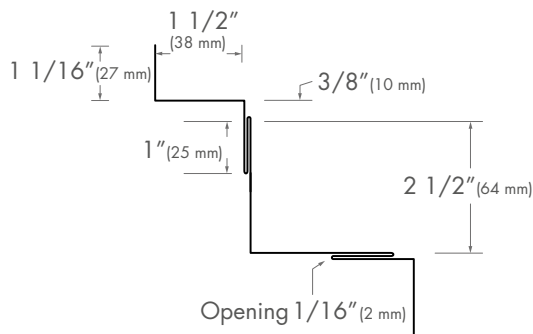

OUTSIDE CORNER

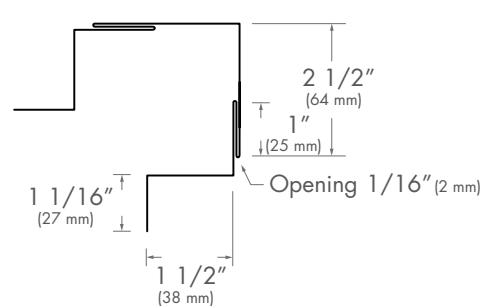

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL



METAL
PRODUCTS

SERVICES

GENERAL	COLOUR CHART	
	GAUGE	22 GA
AVAILABLE COLOURS	PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™	
	QC 262 BLACK	●
ROOFING	QC 273 BONE WHITE	●
	QC 305 STONE GREY	●
SIDING	QC 306 CHARCOAL	●
	QC 314 DEEP GREY	●
ROOFING AND SIDING - CORRUGATED	QC 317 WHITE	●
	QC 695 CAMBRIDGE WHITE	●
CONCEALED FASTENERS	QC 730 REGENT GREY	●
	QC 783 BRIGHT WHITE	●
MOULDINGS	PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®	
	QC 9740 CARBON	●
ACCESSORIES	PREPAINTED FINISHES - POLYURETHANE SERIES	
	QC 7500 METALLIC GREY	●
FLAT STEEL	PREPAINTED FINISHES - GRANITE® DEEP MAT	
	QC 60035 GRAPHITE GREY	●(9)
METAL PRODUCTS	QC 60039 JET BLACK	●(9)
	QC 9789 RIGEL-2	●
SERVICES	(9) Discontinued product. Available while quantities last. Please verify availability.	
	TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE. FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA	


STEEL PROFILE LCD 8

WITH (CODE 100081) AND WITHOUT GROOVE (CODE 10008)

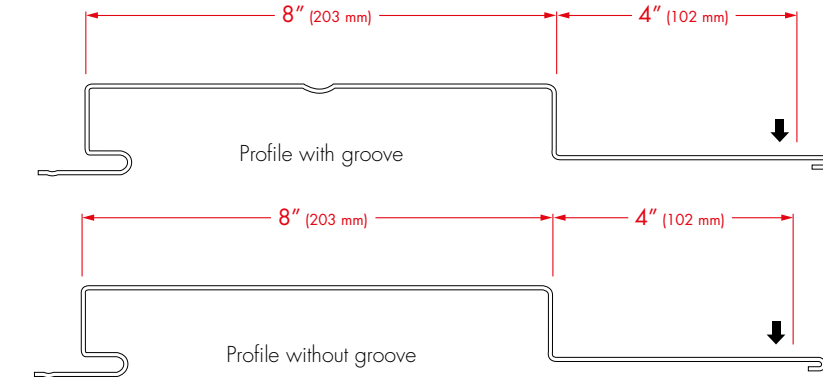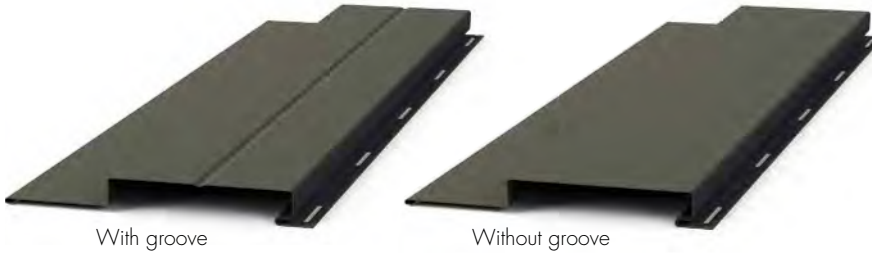

➡ Arrow indicates the colour side.

Product use	Siding
Width before forming	17.5" (445 mm)
Width after forming	12" (305 mm)
Available gauges	22
Height of the rib	1 1/2" (38 mm)
Min. length	4'




MOULDINGS

10' COVERING PIECE (3.05 m)


MOULDINGS FOR LCD 8

OPENING TRIM




*Specify


"J" TRIM

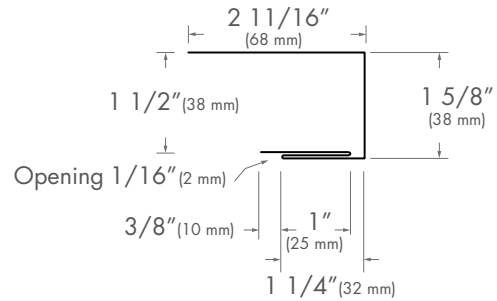

INSIDE CORNER

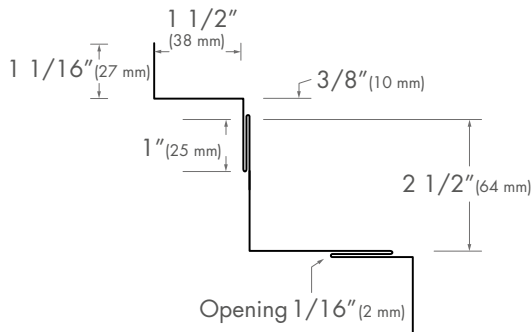

OUTSIDE CORNER

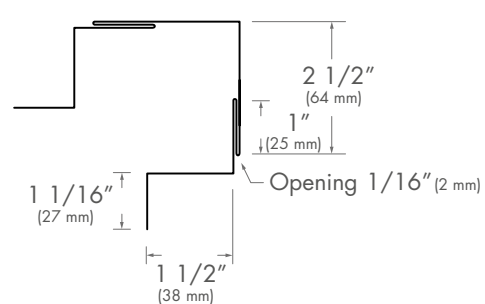

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

GENERAL	COLOUR CHART	
	GAUGE	22 GA
AVAILABLE COLOURS	PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™	
	QC 262	BLACK
ROOFING	QC 273	BONE WHITE
	QC 305	STONE GREY
SIDING	QC 306	CHARCOAL
	QC 314	DEEP GREY
ROOFING AND SIDING - CORRUGATED	QC 317	WHITE
	QC 695	CAMBRIDGE WHITE
CONCEALED FASTENERS	QC 730	REGENT GREY
	QC 783	BRIGHT WHITE
MOULDINGS	PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®	
	QC 9740	CARBON
ACCESSORIES	PREPAINTED FINISHES - POLYURETHANE SERIES	
	QC 7500	METALLIC GREY
FLAT STEEL	PREPAINTED FINISHES - GRANITE® DEEP MAT	
	QC 60035	GRAPHITE GREY
METAL PRODUCTS	QC 60039	JET BLACK
	QC 9789	RIGEL-2
SERVICES	(9) Discontinued product. Available while quantities last. Please verify availability.	
	TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE. FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA	

STEEL PROFILE LCD 11

WITH (CODE 1001111) AND WITHOUT GROOVE (CODE 100111)

residential commercial industrial



GENERAL



With groove

Without groove

Product use	Siding
Width before forming	17.5" (445 mm)
Width after forming	12" (305 mm)
Available gauges	22
Height of the rib	1 1/2" (38 mm)
Min. length	4'

AVAILABLE COLOURS

ROOFING

SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS



MOULDINGS

ACCESSORIES

FLAT STEEL

METAL PRODUCTS

SERVICES

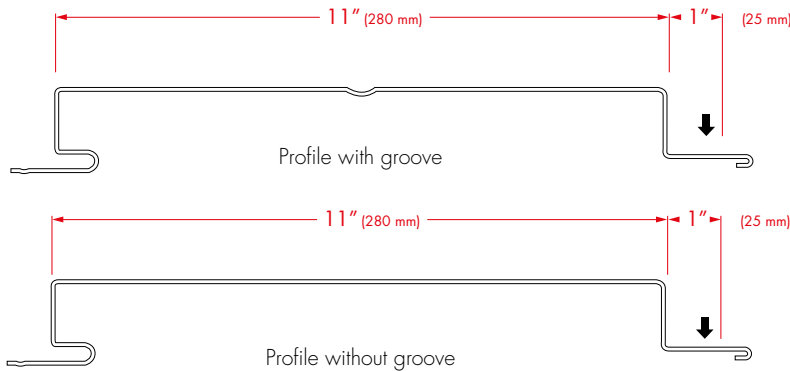


➡ Arrow indicates the colour side.

MOULDINGS

10' COVERING PIECE (3.05 m)


MOULDINGS FOR LCD 11

OPENING TRIM




*Specify


"J" TRIM

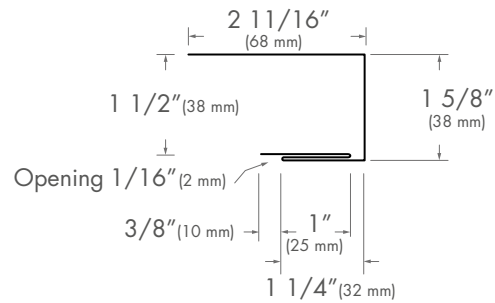

INSIDE CORNER

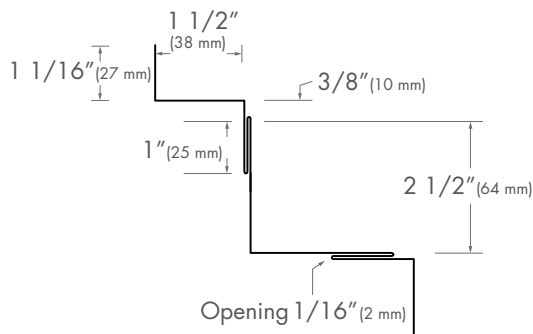

OUTSIDE CORNER

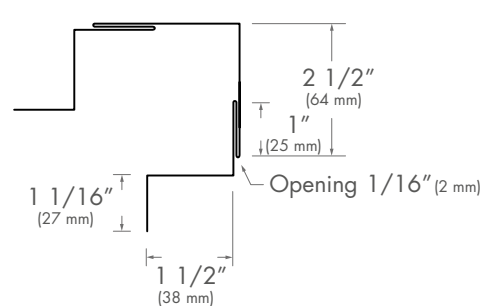

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

GENERAL	COLOUR CHART	
	GAUGE	22 GA
AVAILABLE COLOURS	PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™	
	QC 262 BLACK	●
ROOFING	QC 273 BONE WHITE	●
	QC 305 STONE GREY	●
SIDING	QC 306 CHARCOAL	●
	QC 314 DEEP GREY	●
ROOFING AND SIDING - CORRUGATED	QC 317 WHITE	●
	QC 695 CAMBRIDGE WHITE	●
CONCEALED FASTENERS	QC 730 REGENT GREY	●
	QC 783 BRIGHT WHITE	●
MOULDINGS	PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®	
	QC 9740 CARBON	●
ACCESSORIES	PREPAINTED FINISHES - POLYURETHANE SERIES	
	QC 7500 METALLIC GREY	●
FLAT STEEL	PREPAINTED FINISHES - GRANITE® DEEP MAT	
	QC 60035 GRAPHITE GREY	●(9)
METAL PRODUCTS	QC 60039 JET BLACK	●(9)
	QC 9789 RIGEL-2	●
SERVICES	(9) Discontinued product. Available while quantities last. Please verify availability.	

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE. FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA


STEEL PROFILE LCD 12

WITH (CODE 100121) AND WITHOUT GROOVE (CODE 10012)

residential commercial industrial



GENERAL

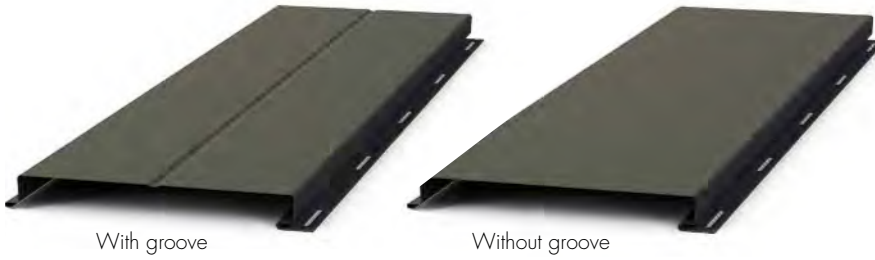

Product use	Siding
Width before forming	17.5" (445 mm)
Width after forming	12" (305 mm)
Available gauges	20, 22
Height of the rib	1 1/2" (38 mm)
Min. length	4'

AVAILABLE COLOURS

ROOFING

SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS


MOULDINGS

ACCESSORIES

FLAT STEEL

METAL PRODUCTS

SERVICES

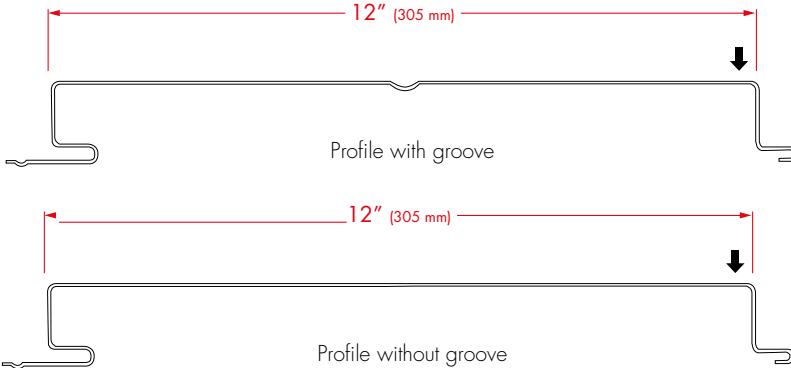


➡ Arrow indicates the colour side.

MOULDINGS

10' COVERING PIECE (3.05 m)


MOULDINGS FOR LCD 12

OPENING TRIM




*Specify


"J" TRIM

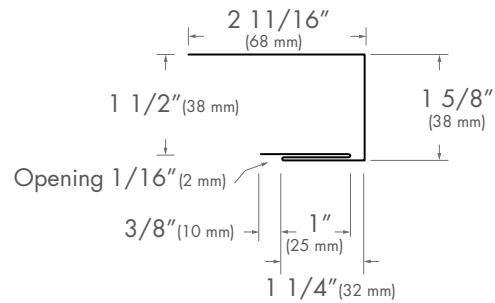

INSIDE CORNER

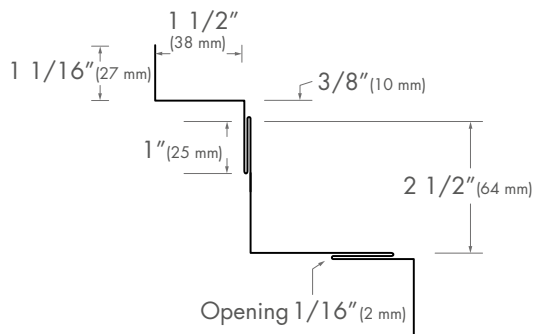

OUTSIDE CORNER

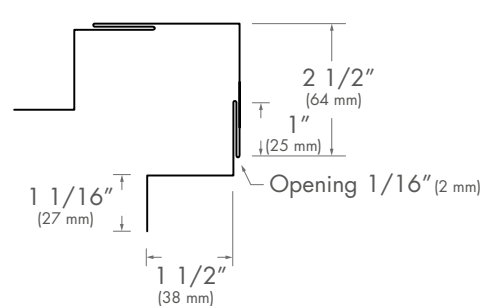

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

GENERAL

AVAILABLE COLOURS

ROOFING

SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL PRODUCTS

SERVICES

COLOUR CHART

GAUGE		22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™		
QC 262	BLACK	●
QC 273	BONE WHITE	●
QC 305	STONE GREY	●
QC 306	CHARCOAL	●
QC 314	DEEP GREY	●
QC 317	WHITE	●
QC 695	CAMBRIDGE WHITE	●
QC 730	REGENT GREY	●
QC 783	BRIGHT WHITE	●
PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®		
QC 9740	CARBON	●
PREPAINTED FINISHES - POLYURETHANE SERIES		
QC 7500	METALLIC GREY	●
PREPAINTED FINISHES - GRANITE® DEEP MAT		
QC 60035	GRAPHITE GREY	●(9)
QC 60039	JET BLACK	●(9)
QC 9789	RIGEL-2	●

(9) Discontinued product. Available while quantities last. Please verify availability.

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA

STEEL PROFILES FOR ROOFING AND SIDING - CORRUGATED



WITH STATE-OF-THE-ART EQUIPMENT, SOME OF THE MOST MODERN FACILITIES IN NORTH AMERICA AND AN EXPERIENCED TEAM, DUCHESNE PRODUCES STEEL ROOFING AND SIDING PRODUCTS IN LINE WITH CURRENT MARKET TRENDS TO MEET THE NEEDS OF CONSUMERS, RETAILERS AND CONSTRUCTION PROFESSIONALS ACROSS EASTERN CANADA.

DESIGN ADVANTAGE

- The renewed popularity of corrugated profiles is due to their look and great versatility
- Their uniform and continuous curves, as well as their effects of texture, shading and symmetry, are in demand and offer infinite possibilities of architectural design for commercial, institutional and industrial buildings
- The CRG 7/8 can be positioned horizontally or vertically when installed on entire walls or as an accent. Result: a unique appearance that gives the building personality and style.


VARIETY OF POSSIBILITIES

- Multiple combinations thanks to the many gauges, widths and colours available
- Greater flexibility for profile overlapping
- Ideal for any wall or roofing installation


DURABLE AND PRACTICALLY MAINTENANCE-FREE

- 3 times more durable than traditional asphalt shingle roofs
- Paint system resistant to fading, chalking and chipping
- Minimal maintenance

CRG 7/8 30.3

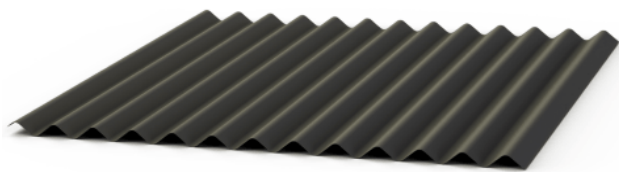

CRG 7/8 38.6

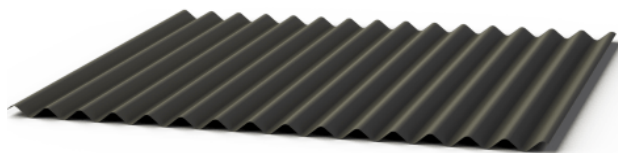

residential



agricultural



commercial




industrial



STEEL PROFILE CRG 7/8 30.3

CODE 1007830

commercial industrial

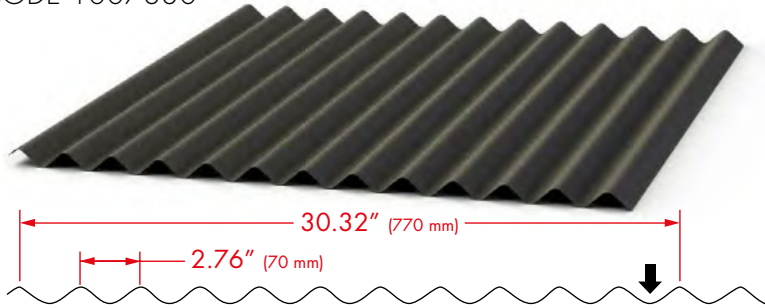

➡ Arrow indicates the colour side.


Product use	Roofing and Siding
Width before forming	42" (1067 mm)
Width after forming	30.32" (770 mm)
Available gauges	24, 26, 28, 30 ¹
Height of the rib	7/8" (22 mm)
Min. length	24"

ACCESSORIES


FOAM CLOSURE STRIP NON-VENTED

Length: 38.58" (980 mm)

Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

Recommended to close openings at the end of sheets

COLOUR CHART

GAUGE	28 GA	26 GA	24 GA
GALVANIZED Z275 (G90)	•	•	•
GALVALUME PLUS AZM150 (AZ50)	•	•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 014 CLAY BROWN	•		
QC 017 COAL GREY	•		
QC 114 GREY	•(9)		
QC 117 COBALT	•		
QC 119 BISCUIT	•		
QC 120 ICE WHITE		•	
QC 229 DARK BROWN	•	•	
QC 797 ORANGE	•		
QC 250 RED	•	•	
QC 259 TILE RED		•	
QC 260 SLATE BLUE	•	•	
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 803 AUTUMN (10)	•		
QC 305 STONE GREY	•		

GAUGE	28 GA	26 GA	24 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 306 CHARCOAL	•	•	
QC 307 DARK GREEN	•	•	
QC 315 TAN	•	•	
QC 317 WHITE	•	•	
QC 326 COCOA BROWN	•		
QC 329 GREEN	•		
QC 386 BRIGHT RED	•		
QC 641 SABLE	•		
QC 659 GREYBERRY	•		
QC 806 SOLAR YELLOW	•		
QC 694 ATRIUM GREEN	•		
QC 726 REFLEX BLUE	•		
QC 730 REGENT GREY	•	•(9)	
QC 790 ROYAL BLUE	•		
PREPAINTED FINISHES - POLYESTER SERIES			
QC 5712 INTERIOR WHITE	•	•	


(9) Discontinued product. Available while quantities last. Please verify availability.

(10) Colour in transition. Please verify availability.

STEEL PROFILE CRG 7/8 38.6

CODE 1007838

commercial industrial

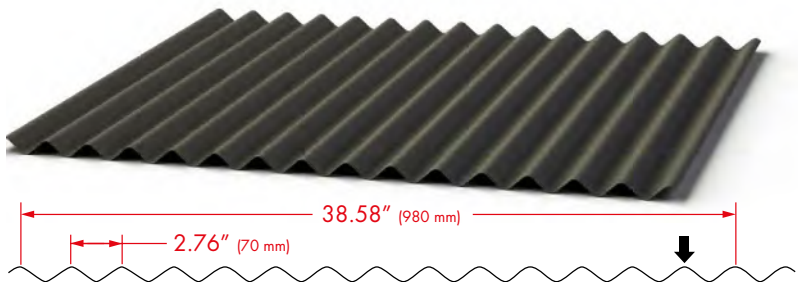

➔ Arrow indicates the colour side.


Product use	Roofing and Siding
Width before forming	51" (1292 mm)
Width after forming	38.58" (980 mm)
Available gauges	22, 24, 26
Height of the rib	7/8" (22 mm)
Min. length	24"




ACCESSORIES

FOAM CLOSURE STRIP NON-VENTED

Length: 38.58" (980 mm)
Width: 1" (25 mm)



OVER the sheet



UNDER the sheet

Recommended
to close openings
at the end of
sheets

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

COLOUR CHART

GAUGE	26 GA	24 GA	22 GA
NATURAL FINISHES			
GALVANIZED Z275 (G90)	•		
GALVALUME PLUS AZM150 (AZ50)	•		
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017 COAL GREY	•		
QC 120 ICE WHITE	•		
QC 229 DARK BROWN	•		
QC 250 RED (10)	•		
QC 260 SLATE BLUE	•		
QC 262 BLACK	•	•	
QC 273 BONE WHITE	•		
QC 305 STONE GREY	•		•
QC 306 CHARCOAL	•	•	•
QC 314 DEEP GREY	•		

GAUGE	26 GA	24 GA	22 GA
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 317 WHITE	•	•	•
QC 330 HERON BLUE	•		
QC 386 BRIGHT RED		•	
QC 695 CAMBRIDGE WHITE	•	•	
QC 730 REGENT GREY	•		
QC 783 BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500 METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821 GRAPHITE	•		
QC 9822 EBONY	•		
QC 9789 RIGEL-2	•		

CONCEALED FASTENERS STEEL PROFILES



AFFORDABLE STYLE AND PEACE OF MIND

- Available in different models in a vast selection of colours to give your imagination free rein
- 3 times more durable than traditional asphalt shingle roofs
- The design's concealed fasteners (perforations and screws not exposed) make them highly watertight
- Lighter than tiles and asphalt shingles: suitable for all types of house structures, including standard ones
- Minimal maintenance
- Steel with recycled content and 100% recyclable that respects the environment
- **Installation required by a professional**



AUTHENTIK™
DUCHESNE



CONTEMPORARY ORIGINAL

The AUTHENTIK™ profile features a trendy style while recalling the stamp of yesteryear's traditional roofs.

MODEL WITH NAIL STRIP

- QUICK AND EASY TO INSTALL
- WALL AND SLOPED ROOF APPLICATIONS (UP TO 1.5 / 12 WITH SEALANT)



MODEL WITH CLIPS

- GREATER LEEWAY FOR THE EXPANSION OF THE MATERIAL (RECOMMENDED FOR LONG PANELS)
- WALL AND SLOPED ROOF APPLICATIONS (UP TO 1.5 / 12 WITH SEALANT)



CLASSIK™
DUCHESNE



BEAUTIFUL TRADITION

The CLASSIK™ profile combines the charm of ancestral roofs and the attractive appearance of steel sidings with concealed fasteners.

MODEL WITH CLIPS

- PRACTICAL AND VERSATILE
- OPTIONAL FLOATING CLIPS SO TO BETTER MANAGE EXPANSION MOVEMENTS
- INSTALLATION BY SEAMING
- WALL AND SLOPED ROOF APPLICATIONS (UP TO 1.5 / 12 WITH SEALANT)



MAJESTIK™
DUCHESNE



PRESTIGIOUS

The MAJESTIK™ profile, featuring a batten style with concealed fasteners, stands out by its majestic refinement, accented by imposing ribs that give unique character to any building.

MODEL WITH CLIPS

- WALL AND SLOPED ROOF APPLICATIONS (MINIMUM 3/12 RECOMMENDED AND UP TO 2 / 12 WITH SEALANT)



residential agricultural commercial industrial



CONCEALED FASTENERS PROFILE AUTHENTIK™


WITH NAIL STRIP

CODE 10040

residential commercial




GENERAL



➔ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming	23.125" (587 mm) or 27.125" (689 mm)
Width after forming	16" (406 mm) or 20"* (508 mm)
Available gauges	22, 24, 26
Height of the rib	1 7/16" (37 mm)
Min. length	4'

* 20" model not available in 26 gauge. In 24 gauge, the 20" model is not available in the plain model.



AVAILABLE COLOURS


ROOFING

MOULDINGS AND ACCESSORIES

MOULDINGS FOR AUTHENTIK

10' COVERING PIECE (3.05 m)

AUTHENTIK GABLE TRIM - 1312



STANDARD THICKNESS: 28GA

Other compatible universal accessories and mouldings are available. See pages 58 to 92.


ROOFING UNDERLAYMENT

ROOFING UNDERLAYMENT in roll

Roofing underlayment 1000 sq.ft (93 sq.m)
4' x 250' (1.22 m x 76.2 m)

Adhesive roofing underlayment 216 sq.ft (20 sq. m)
3' x 72' (0.91 m x 22 m)

PLASTIC CAP NAILS



Ideal for the installation of roofing underlayment.


Offered in 2", 2 1/2" and 3" lengths

Please refer to our catalogue under the construction nail section.


REINFORCEMENT

REINFORCEMENT

STRIATIONS



MULTIPLE RIBS



SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS

IMPORTANT NOTICE

CONCEALED FASTENERS STEEL PROFILE: AUTHENTIK

Minimum roof slope required

When used on a roof, Duchesne concealed fasteners steel profiles must be installed on a minimum roof slope of 3/12. In the case where a sealant is applied on site, the minimum pitch may be 1.5/12. It is the responsibility of the installer to ensure the tightness of the installation with sealant.

Solid substrate

All Duchesne concealed fasteners steel profiles used on a roof must be installed on a solid substrate.

Roofing underlayment required

A roofing underlayment is required for any roof using the Authentik profile.

Please refer to the installation guide for more information about the installation of Duchesne concealed fasteners steel profiles.

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL PRODUCTS


SERVICES

Bending tools may be required for the installation of the Authentik™ profile (see page 56). Contact the Internal Sales Service for more information regarding the availability of Duchesne installation tools.

CONCEALED FASTENERS PROFILE AUTHENTIK™ WITH CLIP

CODE 10041


residential commercial



→ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming	21.15" (537 mm) or 25.15" (639 mm)
Width after forming	16" (406 mm) or 20"* (508 mm)
Available gauges	22, 24, 26
Height of the rib	1 7/16" (37 mm)
Min. length	4'

* 20" model not available in 26 gauge. In 24 gauge, the 20" model is not available in the plain model.




MOULDINGS AND ACCESSORIES

REINFORCEMENT

MOULDINGS FOR AUTHENTIK

10" COVERING PIECE (3,05 m)

AUTHENTIK GABLE TRIM - 1312





STANDARD THICKNESS: 28GA

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

CLIPS

AUTHENTIK CLIPS



Clips are supplied with profiles in a sufficient quantity (installation at each 2' between the first and the last - see installation guide). Additional clips can be ordered in box of 50 clips.

ROOFING UNDERLAYMENT


ROOFING UNDERLAYMENT in roll

Roofing underlayment 1000 sq.ft (93 sq.m)
4' x 250' (1.22 m x 76.2 m)


Adhesive roofing underlayment 216 sq.ft (20 sq. m)
3' x 72' (0.91 m x 22 m)

REINFORCEMENT

STRIATIONS



MULTIPLE RIBS



IMPORTANT NOTICE

CONCEALED FASTENERS STEEL PROFILE: CLASSIK

Minimum roof slope required

When used on a roof, Duchesne concealed fasteners steel profiles must be installed on a minimum roof slope of 3/12. In the case where a sealant is applied on site, the minimum pitch may be 1.5/12. It is the responsibility of the installer to ensure the tightness of the installation with sealant.

Solid substrate


All Duchesne concealed fasteners steel profiles used on a roof must be installed on a solid substrate.

Roofing underlayment required

A roofing underlayment is required for any roof using the Authentik profile.

Please refer to the installation guide for more information about the installation of Duchesne concealed fasteners steel profiles.

PLASTIC CAP NAILS



Ideal for the installation of roofing underlayment.

Offered in 2", 2 1/2" and 3" lengths

Please refer to our catalogue under the construction nail section.

Bending tools may be required for the installation of the Authentik™ profile (see page 56).
Contact the Internal Sales Service for more information regarding the availability of Duchesne installation tools.

COLOUR CHART

GAUGE		26 GA	24 GA	22 GA
NATURAL FINISHES				
GALVALUME PLUS AZM150 (AZ50)		•		
GALVALUME PLUS AZM180 (AZ60)			•	
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 017	COAL GREY	•		
QC 120	ICE WHITE	•		
QC 229	DARK BROWN	•		
QC 250	RED	•		
QC 260	SLATE BLUE	•		
QC 262	BLACK	•	•	
QC 273	BONE WHITE	•		
QC 305	STONE GREY	•		
QC 306	CHARCOAL	•	•	•
QC 314	DEEP GREY	•		
QC 315	TAN		•	
QC 317	WHITE	•	•	
QC 330	HERON BLUE	•		
QC 386	BRIGHT RED		•	
QC 695	CAMBRIDGE WHITE	•		
QC 730	REGENT GREY	•		
QC 783	BRIGHT WHITE	•		
PREPAINTED FINISHES - POLYURETHANE SERIES				
QC 7500	METALLIC GREY	•	•	
PREPAINTED FINISHES - TEXTURED SMP SERIES				
QC 9821	GRAPHITE	•		
QC 9822	EBONY	•		
QC 9789	RIGEL-2	•		

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA

CONCEALED FASTENERS PROFILE CLASSIK™


CODE 10042

residential commercial



→ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming	17.50" (445 mm) or 19.13" (486 mm) or 23.13" (587 mm)
Width after forming	14.5" (368 mm) or 16" (406 mm) or 20" (508 mm)
Available gauges	22, 24, 26
Height of the rib	1 3/16" (30 mm)
Min. length	4'




MOULDINGS AND ACCESSORIES

MOULDINGS FOR CLASSIK

10' COVERING PIECE (3.05 m)

CLASSIK GABLE STARTER - 1332*

CLASSIK GABLE END TRIM - 1334*

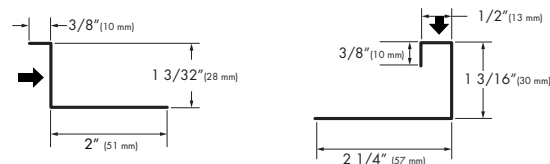


STANDARD THICKNESS: 26GA

Other compatible universal accessories and mouldings are available. See pages 58 to 92.


CLIPS

CLIPS CLASSIK

Fixed clip for panel under 20' long



Floating clip for panel 20' long and over



Clips are supplied with profiles in a sufficient quantity (installation at each 2' between the first and the last - see installation guide). Additional clips can be ordered in box of 50 clips.

ROOFING UNDERLAYMENT

ROOFING UNDERLAYMENT in roll

Roofing underlayment 1000 sq.ft (93 sq.m)
4' x 250' (1.22 m x 76.2 m)


Adhesive roofing underlayment 216 sq.ft (20 sq. m)
3' x 72' (0.91 m x 22 m)

A seamer is required for the installation of the Classik™ profile (see pages 56-57). Bending tools may be required for the installation of the Classik™ profile. Contact the Internal Sales service for more information regarding the availability of Duchesne installation tools.


REINFORCEMENT

REINFORCEMENT


STRIATIONS



MAJOR RIB



2 CRIMPING MODES



* Double fold (180°) crimping mode not possible on 22 gauge Classik profile

IMPORTANT NOTICE

CONCEALED FASTENERS STEEL PROFILE: CLASSIK

Minimum roof slope required

When used on a roof, Duchesne concealed fasteners steel profiles must be installed on a minimum roof slope of 3/12. In the case where a sealant is applied on site, the minimum pitch may be 1.5/12. It is the responsibility of the installer to ensure the tightness of the installation with sealant.

Solid substrate


All Duchesne concealed fasteners steel profiles used on a roof must be installed on a solid substrate.

Roofing underlayment required

A roofing underlayment is required for any roof using the Classik profile.

Please refer to the installation guide for more information about the installation of Duchesne concealed fasteners steel profiles.

PLASTIC CAP NAILS



Ideal for the installation of roofing underlayment.

Offered in 2", 2 1/2" and 3" lengths

Please refer to our catalogue under the construction nail section.

COLOUR CHART

GAUGE	26 GA	24 GA	22 GA* CLASSIK 14.5"	22 GA** CLASSIK 16"/20"
NATURAL FINISHES				
GALVALUME PLUS AZM150 (AZ50)	•			
GALVALUME PLUS AZM180 (AZ60)		•		
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™				
QC 017 COAL GREY	•			
QC 120 ICE WHITE	•			
QC 229 DARK BROWN	•		•	
QC 250 RED	•			
QC 260 SLATE BLUE	•			
QC 262 BLACK	•	•	•(4)	
QC 273 BONE WHITE	•		•	
QC 305 STONE GREY	•		•	•
QC 306 CHARCOAL	•	•	•	•
QC 314 DEEP GREY	•		•	
QC 315 TAN		•		
QC 317 WHITE	•	•		
QC 330 HERON BLUE	•			
QC 386 BRIGHT RED		•		
QC 695 CAMBRIDGE WHITE	•		•	
QC 730 REGENT GREY	•		•	
QC 783 BRIGHT WHITE	•			
PREPAINTED FINISHES - METALLIC SERIES - PVDF - KYNAR 500®				
QC 9740 CARBON			•	
PREPAINTED FINISHES - POLYURETHANE SERIES				
QC 7500 METALLIC GREY	•	•	•	
PREPAINTED FINISHES - GRANITE® DEEP MAT				
QC 60035 GRAPHITE GREY			•	
QC 60039 JET BLACK			•(9)	
PREPAINTED FINISHES - GRANITE® DEEP MAT				
QC 9821 GRAPHITE	•			
QC 9822 EBONY	•			
QC 9789 RIGEL-2	•			

* Width after forming : 14.5"

** Width after forming : 16" and 20"


(4) Also available in 20 GA on special order

(9) Discontinued product. Available while quantities last. Please verify availability.

CONCEALED FASTENERS PROFILE MAJESTIK™


CODE 10043

residential commercial



→ Arrow indicates the colour side.

Product use	Roofing and Siding
Width before forming	21.15" (537 mm) or 25.15" (639 mm)
Width after forming	16" (406 mm) or 20" (508 mm)
Available gauges	24, 26
Height of the rib	1 5/8" (41 mm)
Min. length	4'




MOULDINGS AND ACCESSORIES

REINFORCEMENT

MOULDINGS FOR MAJESTIK

10' COVERING PIECE (3.05 m)

MAJESTIK GABLE TRIM - 1322





STANDARD THICKNESS: 28GA

Other compatible universal accessories and mouldings are available. See pages 58 to 92.

CLIPS

MAJESTIK CLIPS



Clips are supplied with profiles in a sufficient quantity (installation at each 2' between the first and the last - see installation guide). Additional clips can be ordered in box of 50 clips.

ROOFING UNDERLAYMENT


ROOFING UNDERLAYMENT in roll

Roofing underlayment 1000 sq.ft (93 sq.m)
4' x 250' (1.22 m x 76.2 m)


Adhesive roofing underlayment 216 sq.ft (20 sq. m)
3' x 72' (0.91 m x 22 m)

REINFORCEMENT

STRIATIONS



MAJOR RIB



IMPORTANT NOTICE

CONCEALED FASTENERS STEEL PROFILE: MAJESTIK

Minimum roof slope required

When used on a roof, Duchesne concealed fasteners steel profiles must be installed on a minimum roof slope of 3/12. In the case where a sealant is applied on site, the minimum pitch may be 2/12. It is the responsibility of the installer to ensure the tightness of the installation with sealant.

Solid substrate


All Duchesne concealed fasteners steel profiles used on a roof must be installed on a solid substrate.

Roofing underlayment required

A roofing underlayment is required for any roof using the Majestik profile.

Please refer to the installation guide for more information about the installation of Duchesne concealed fasteners steel profiles.

PLASTIC CAP NAILS



Ideal for the installation of roofing underlayment.

Offered in 2", 2 1/2" and 3" lengths

Please refer to our catalogue under the construction nail section.

Bending tools may be required for the installation of the Majestik™ profile (see page 56).
Contact our Internal Sales Service for more information regarding the availability of Duchesne installation tools.

COLOUR CHART

GAUGE		26 GA	24 GA
NATURAL FINISHES			
GALVALUME PLUS AZM150 (AZ50)		•	
GALVALUME PLUS AZM180 (AZ60)			•
PREPAINTED FINISHES - PERSPECTRA PLUS SERIES™			
QC 017	COAL GREY	•	
QC 120	ICE WHITE	•	
QC 229	DARK BROWN	•	
QC 250	RED (10)	•	
QC 260	SLATE BLUE	•	
QC 262	BLACK	•	•
QC 273	BONE WHITE	•	
QC 305	STONE GREY	•	
QC 306	CHARCOAL	•	•
QC 314	DEEP GREY	•	
QC 315	TAN		•
QC 317	WHITE	•	•
QC 330	HERON BLUE	•	
QC 386	BRIGHT RED		•
QC 695	CAMBRIDGE WHITE	•	
QC 730	REGENT GREY	•	
QC 783	BRIGHT WHITE	•	
PREPAINTED FINISHES - POLYURETHANE SERIES			
QC 7500	METALLIC GREY	•	•
PREPAINTED FINISHES - GRANITE® DEEP MAT			
QC 60035	GRAPHITE GREY	•	
QC 60039	JET BLACK	•(9)	
PREPAINTED FINISHES - TEXTURED SMP SERIES			
QC 9821	GRAPHITE	•	
QC 9822	EBONY	•	
QC 9789	RIGEL-2	•	

(9) Discontinued product. Available while quantities last. Please verify availability.

TO CONFIRM COLOUR AVAILABILITY OR TO INQUIRE ABOUT COLOUR / GAUGE OPTIONS NOT LISTED PLEASE CONTACT YOUR DUCHESNE ET FILS LTÉE REPRESENTATIVE.
FOR DETAILS, LOAD TABLES OR PRODUCT BROCHURES, PLEASE VISIT WWW.DUCHESNE.CA



BENDING TOOLS

FOR CONCEALED FASTENERS PROFILES

Bending tools are used with **Authentik™**, **Majestik™** and **Classik™** concealed fasteners profiles for manual folding during on-site installation. Different widths are required depending on the model of the profile, width of the profile and type of fold (90° inside or 180° outside). Please refer to the concealed fasteners profiles installation guide for more information on how to manipulate the bending tools. Generally, the folds 90° inside and 180° outside are necessary during the installation.

Features:

- Made of aluminum
- Can bend steel up to 22 gauge (0.0299" - 0.759 mm)
- The depth of the fold is 1 1/2" but it is possible to adjust it to 1" with screws 1/4" x 20 included.

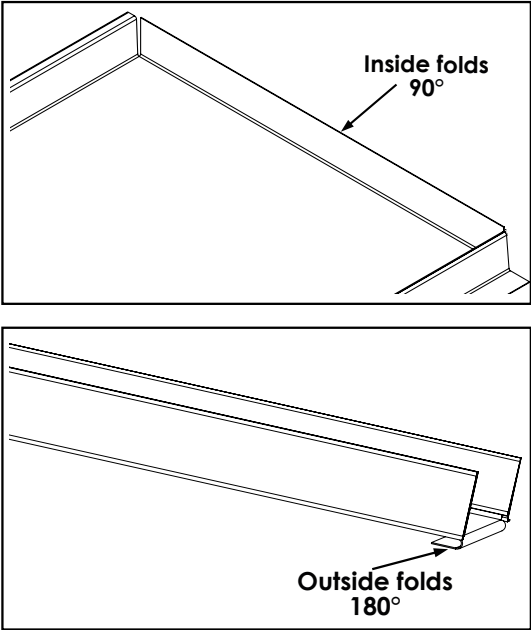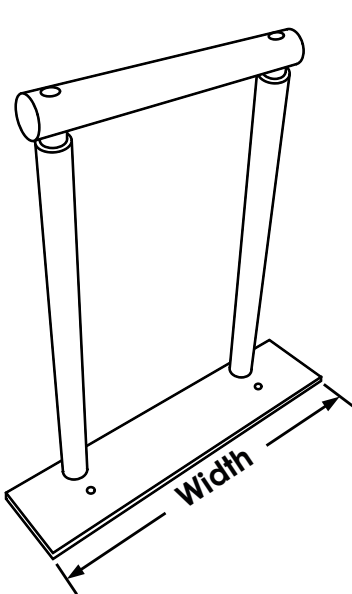


WIDTHS OF THE BENDING TOOLS			
PROFILE MODEL	PROFILE WIDTH	BENDING TOOL WIDTH	
		INSIDE FOLD 90°	OUTSIDE FOLD 180°
AUTHENTIK™	16"	BENDING TOOL 15"	BENDING TOOL 17"
AUTHENTIK™	20"	BENDING TOOL 19"	BENDING TOOL 20"
CLASSIK™	14.5"	BENDING TOOL 13.5"	BENDING TOOL 15"
CLASSIK™	16"	BENDING TOOL 15"	BENDING TOOL 17"
CLASSIK™	20"	BENDING TOOL 17"	BENDING TOOL 19"
MAJESTIK™	16"	BENDING TOOL 15"	BENDING TOOL 17"
MAJESTIK™	20"	BENDING TOOL 19"	BENDING TOOL 20"

Contact Internal Sales for more information about the availability of Duchesne bending tools.

SEAMING TOOLS

FOR CONCEALED FASTENERS PROFILES (CLASSIK™)




CLASSIK Motorised seamer

Classik motorized seamer consists of forming rolls that form Classik™ concealed fastener profiles joints. It performs single-fold (90°) or double-fold (180°) forming with a single pass.

The seamer has an automatic shut-off device which detects the arrival of the seamer at the edge of a roof and automatically stops operation. This feature makes it possible to avoid bad manipulations which can lead to additional costs and loss of time.


Specifications
• Standing seam : 1.5" (38 mm) • Single-fold (90°) or double-fold (180°) forming with a single pass • Speed : 30 feet / minute (9.1 m/min.) • Power : 7 amps • Volts : 110-125V • Weight : 40 lb (18.2 kg) • Crimping in 4 motor stages • 1" (25 mm) diameter lock bar • Forming rolls made with stainless steel 416 • Mechanical retention of the roller bearing
Maximum forming capacity
• 22 gauge steel

The Classik motorized seamer is not designed to form joints of other profiles.

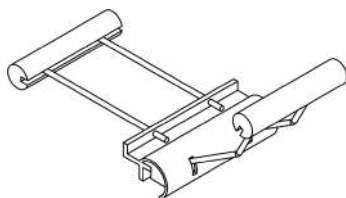

CLASSIK 90° manual seamer

Classik 90° manual seamer is usefull for the preparation of the 90° motorised crimping. It is also usefull for the first step of the 180° motorised crimping.

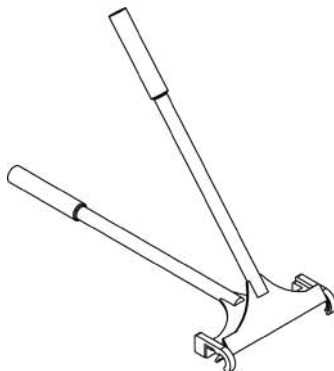

CLASSIK 180° manual seamer

Classik 180° manual seamer is usefull for the preparation of the 180° motorised crimping, following the first preparation step carried out with the 90° manual seamer.

Contact Internal Sales for more information about availability and usage of the seaming tools.


MOULDINGS FOR ROOFING AND SIDING



◆ Mouldings - Colour QC 015 Velvet linen

SIDING

STANDARD STEEL MOULDINGS

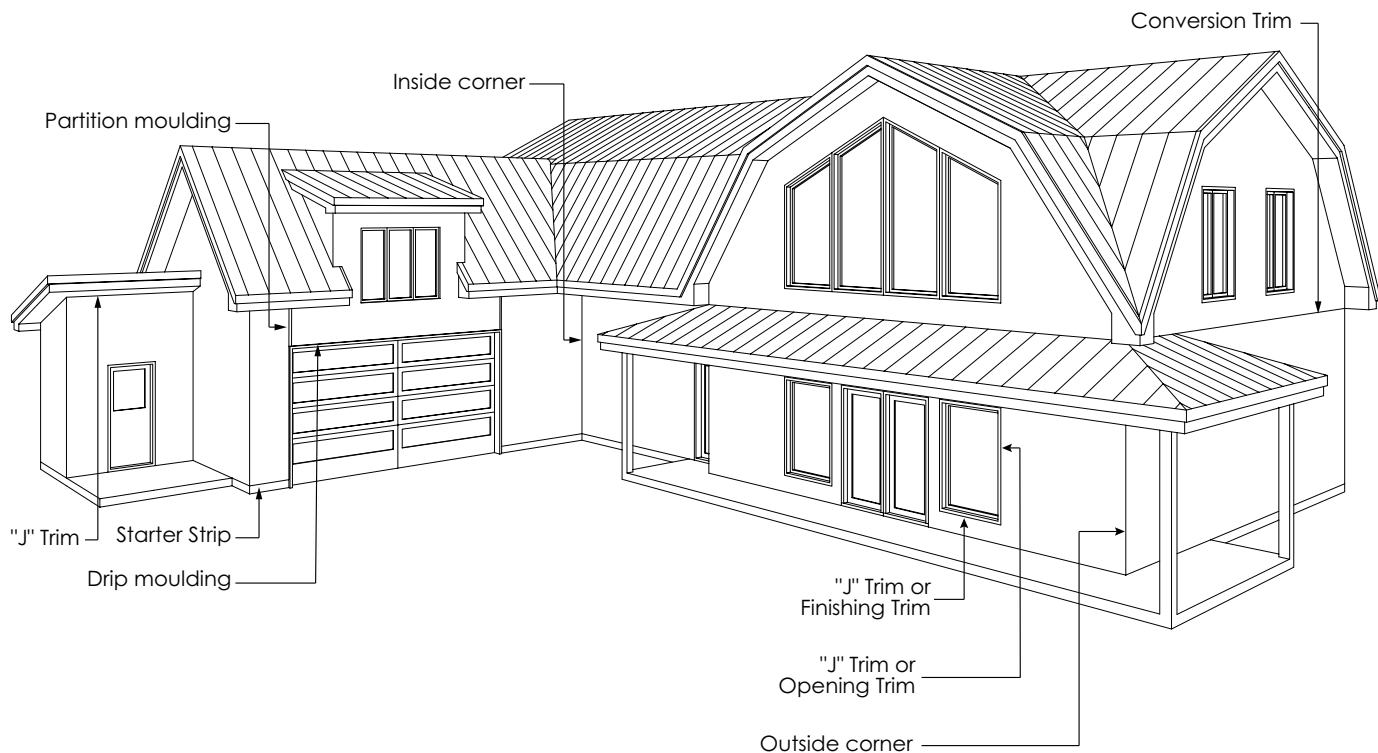

Conversions Trims	66
Drips mouldings.....	66-67
Finishing trim	67
Flashing	67
Inside corner	68
"J" Trim	69
"L" Trim	69
Opening Trim.....	70
Outside corner	70-71
Partition moulding	71
Starter strips	72

SIDING

STANDARD STEEL MOULDINGS



STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

CONVERSIONS TRIM

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES	
	• GALVANIZED • GALVALUME PLUS • PREPAINTED • ALUMINUM BRIGHT (313) • ALUMINUM PREPAINTED (313)	CODE	A	B	C	OPENING		
		*313	5/8\"/>	1 3/8\"/>	-	1/2\"/>	TR 5, TR 7, LC 15, LC 17, LC 19	
		*713	13/16\"/>	1 5/16\"/>	-	3/4\"/>	TR 9, TR 80, LC 23, LC 25	
		*813	15/16\"/>	1 5/16\"/>	-	15/16\"/>	1\"/>	CRG 7/8
		*913	1 9/16\"/>	1 3/8\"/>	-	1 9/16\"/>	1 5/8\"/>	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK

DRIP MOULDING (CONTINUED ON NEXT PAGE)

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*515	3/4" 19 mm	1" 25 mm	-	5/8" 16 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*715	7/8" 22 mm	1 1/2" 38 mm	-	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*815	1" 25 mm	1 1/2" 38 mm	-	15/16" 1" 24 mm 25 mm	CRG 7/8
		*915	1 3/4" 44 mm	1 5/8" 41 mm	-	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
 "C" TO SPECIFY: 3/4" (19 mm) TO 9" (229 mm)	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*516	3/4" 19 mm	-	SPECIFY	5/8" 16 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*716	7/8" 22 mm	-	SPECIFY	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*816	1" 25 mm	-	SPECIFY	15/16" 1" 24 mm 25 mm	CRG 7/8
		*916	1 5/8" 41 mm	-	SPECIFY	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK


*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


SIDING


STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➡ INDICATES THE COLOR SIDE

DRIP MOULDING (CONTINUATION FROM THE PREVIOUS PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	• GALVANIZED (EXCEPT 1137 AND 1237) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*537	3/4" 19 mm	5/8" 16 mm	2 1/4" 57 mm	5/8" 16 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*737	7/8" 22 mm	1/2" 13 mm	2 1/8" 54 mm	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*837	1" 25 mm	5/8" 16 mm	2 1/4" 57 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*937	1 9/16" 40 mm	1" 25 mm	2 1/4" 57 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
		*1137	1 3/4" 44 mm	1" 25 mm	2 1/4" 57 mm	1 3/4" 44 mm	MAJESTIK
		*1237	1 1/4" 32 mm	1" 25 mm	2 1/4" 57 mm	1 1/4" 32 mm	CLASSIK

FINISHING TRIM							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*222	1 5/8" 41 mm	1/2" 13 mm	-	-	ALL PROFILES

FLASHING							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*600	6" 152 mm	-	-	-	ALL PROFILES
		*601	9" 229 mm	-	-	-	
		*602	12" 305 mm	-	-	-	

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES





SIDING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

INSIDE CORNER

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*212	2 1/2" 64 mm	-	-	-	ALL PROFILES
		*214	4" 102 mm	-	-	-	
	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*252	2" 51 mm	1" 25 mm	-	-	ALL PROFILES
	• GALVANIZED (EXCEPT 1104 AND 1204) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*304	1/2" 13 mm	1 1/4" 32 mm	-	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*704	13/16" 21 mm	1 1/4" 32 mm	-	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*804	15/16" 24 mm	1 1/4" 32 mm	-	15/16" 24 mm 1" 25 mm	CRG 7/8
		*904	1 9/16" 40 mm	1 3/8" 35 mm	-	1 9/16" 40 mm 1 5/8" 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
		*1104	1 3/4" 44 mm	1 3/8" 35 mm	-	1 3/4" 44 mm	MAJESTIK
		*1204	1 1/4" 32 mm	1 3/8" 35 mm	-	1 1/4" 32 mm	CLASSIK
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*305	1/2" 13 mm	3 1/4" 83 mm	1 3/8" 35 mm	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19



*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


SIDING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

"J" TRIM							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	- GALVANIZED - GALVALUME PLUS - PREPAINTED (EXCEPT WHITE 317 - 30GA)	CODE	A	B	C	OPENING	
		*307	9/16" 14 mm	7/8" 22 mm	1 5/8" 41 mm	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*707	13/16" 21 mm	7/8" 22 mm	1 3/8" 35 mm	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*807	15/16" 24 mm	7/8" 22 mm	1 7/16" 37 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*907	1 9/16" 40 mm	7/8" 22 mm	1 1/2" 38 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
	- GALVANIZED (EXCEPT 1127 AND 1227) - GALVALUME PLUS - PREPAINTED	CODE	A	B	C	OUVERTURE	
		*327	1/2" 13 mm	1 11/16" 43 mm	-	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*727	13/16" 21 mm	1 3/4" 44 mm	-	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*827	15/16" 24 mm	1 3/4" 44 mm	-	15/16" 1" 24 mm 25 mm	CRG 7/8
		*927	1 9/16" 40 mm	1 3/4" 44 mm	-	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
		*1127	1 3/4" 44 mm	2" 51 mm	-	1 3/4" 44 mm	MAJESTIK
		*1227	1 1/4" 32 mm	1 3/4" 44 mm	-	1 1/4" 32 mm	CLASSIK

"L" TRIM							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	- GALVANIZED - GALVALUME PLUS - PREPAINTED	CODE	A	B	C	OPENING	
		*308	3/4" 19 mm	1 5/8" 41 mm	1/2" 13 mm	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.



GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES



SIDING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

OPENING TRIM							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
 "C" TO SPECIFY: 3/4" (19 mm) TO 9" (229 mm)	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*309	1/2" 13 mm	1 3/8" 35 mm	SPECIFY	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*709	13/16" 21 mm	1 5/8" 41 mm	SPECIFY	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*809	15/16" 24 mm	1 5/8" 41 mm	SPECIFY	15/16" 1" 24 mm 25 mm	CRG 7/8
		*909	1 9/16" 40 mm	1 1/2" 38 mm	SPECIFY	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
 "C" TO SPECIFY: 3/4" (19 mm) TO 9" (229 mm)	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OUVERTURE	
		*310	1/2" 13 mm	1 1/2" 38 mm	SPECIFY	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19

OUTSIDE CORNER (CONTINUED ON NEXT PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*202	2 1/2" 64 mm	-	-	-	ALL PROFILES
		*204	4" 102 mm	-	-	-	
	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*242	2" 51 mm	1" 25 mm	-	-	ALL PROFILES

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.



SIDING


STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES

OUTSIDE CORNER (CONTINUATION FROM THE PREVIOUS PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	• GALVANIZED (EXCEPT 1101 AND 1201) • GALVALUME PLUS • PREPAINTED • ALUMINUM BRIGHT (301) • ALUMINUM PREPAINTED (301)	CODE	A	B	C	OPENING	PROFILES
		*301	1/2" 13 mm	3 1/4" 83 mm	-	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*701	13/16" 21 mm	3 1/4" 83 mm	-	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*801	15/16" 24 mm	2 7/8" 73 mm	-	15/16" 1" 24 mm 25 mm	CRG 7/8
		*901	1 9/16" 40 mm	3 1/8" 79 mm	-	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
		*1101	1 3/4" 44 mm	3 1/8" 79 mm	-	1 3/4" 44 mm	MAJESTIK
		*1201	1 1/4" 32 mm	3 1/8" 79 mm	-	1 1/4" 32 mm	CLASSIK
	• GALVANIZED • GALVALUME PLUS • PREPAINTED • ALUMINUM BRIGHT (302) • ALUMINUM PREPAINTED (302)	CODE	A	B	C	OPENING	PROFILES
		*302	1/2" 13 mm	1 1/4" 32 mm	1/2" 13 mm	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*702	13/16" 21 mm	1 3/8" 35 mm	3/4" 19 mm	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*802	15/16" 24 mm	1 11/16" 43 mm	3/4" 19 mm	15/16" 1" 24 mm 25 mm	CRG 7/8

PARTITION MOULDING							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	PROFILES
		*314	1/2" 13 mm	3" 76 mm	1 1/4" 32 mm	1/2" 13 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*714	3/4" 19 mm	3 3/8" 86 mm	1 1/4" 32 mm	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*814	15/16" 24 mm	4" 102 mm	1 1/2" 38 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*914	1 9/16" 40 mm	4 5/16" 110 mm	1 1/2" 38 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


SIDING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**

➡ INDICATES THE COLOR SIDE


STARTER STRIP

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED (EXCEPT 1117 AND 1217) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*517	3/4" 19 mm	1/2" 13 mm	1 1/2" 38 mm	5/8" 16 mm	TR 5, TR 7, LC 15, LC 17, LC 19
		*717	7/8" 22 mm	7/16" 11 mm	1 1/4" 32 mm	3/4" 19 mm	TR 9, TR 80, LC 23, LC 25
		*817	1" 25 mm	1/2" 13 mm	1 1/2" 38 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*917	1 5/8" 41 mm	1/2" 13 mm	1 1/2" 38 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 27, LC 29, LCD 12, AUTHENTIK
		*1117	1 3/4" 44 mm	1/2" 13 mm	1 1/2" 38 mm	1 3/4" 44 mm	MAJESTIK
		*1217	1 1/4" 32 mm	1/2" 13 mm	1 1/2" 38 mm	1 1/4" 32 mm	CLASSIK

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

ROOFING

STANDARD STEEL MOULDINGS

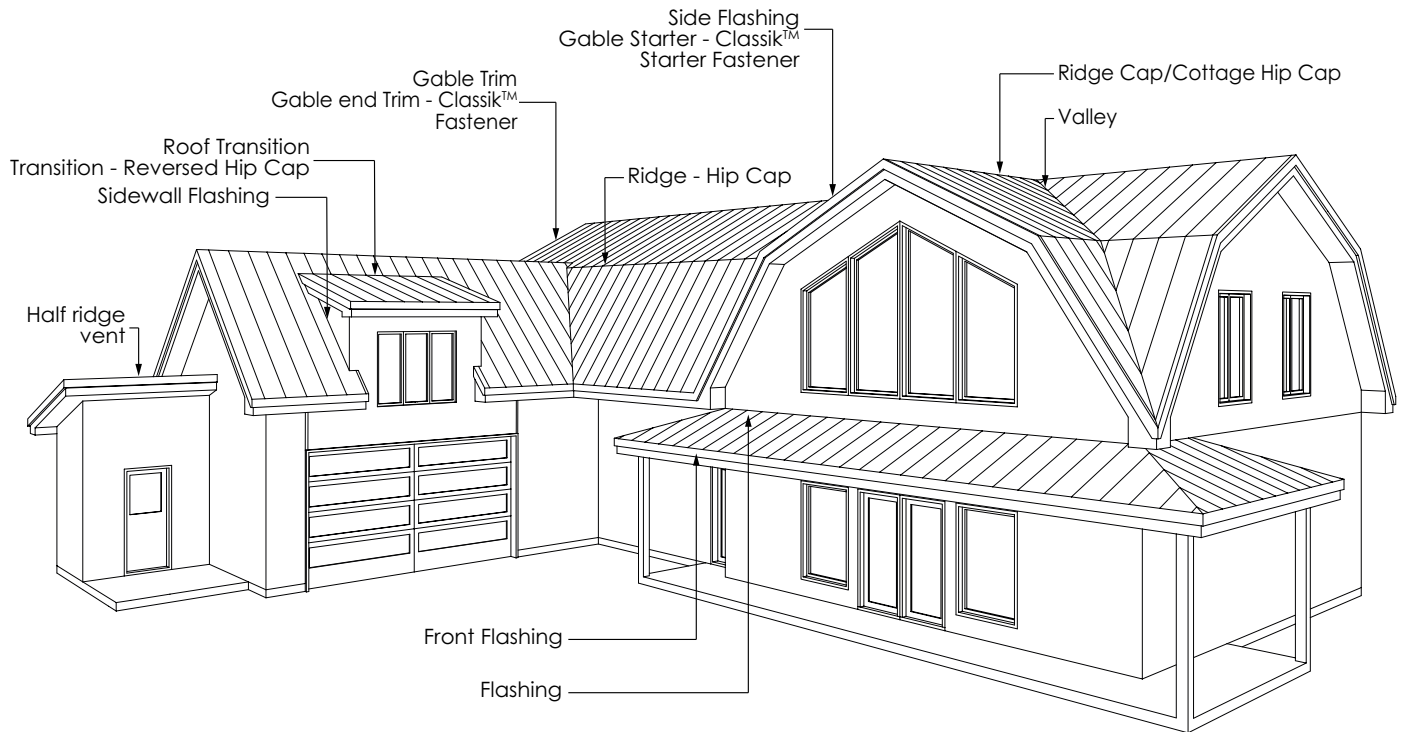

Cottage hip cap	74
Fastener	74
Flashing	74-75
Front flashing	75
Gable end trim Classik™	76
Gable starter Classik™	76
Gable trim	76
Gable trim Authentik™	76
Gable trim Majestik™	77
Half ridge vent™	77
"J" Trim	77
Ridge cap	78-79
Ridge hip cap	79
Roof transition	79
Side flashing	80
Sidewall flashing	80-81
Starter fastener	81
Transition - Reversed hip cap	81
Valleys	82

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES


ROOFING

STANDARD STEEL MOULDINGS



STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

COTTAGE HIP CAP

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 RECOMMENDED TO BE INSTALLED WITH FOAM CLOSURE STRIPS AVAILABLE ON PAGE 83.	• GALVANIZED • GALVALUME PLUS • PREPAINTED • ALUMINUM BRIGHT (141-12)	CODE	A	B	C	OPENING	ALL ROOFING PROFILES
		*141-12	3" 76 mm	1/2" 13 mm	4" 102 mm	-	
		*141-15	3" 76 mm	1/2" 13 mm	5 1/2" 140 mm	-	

FASTENER

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*232	2 3/8" 60 mm	1/2" 13 mm	-	-	ALL ROOFING PROFILES
 STANDARD THICKNESS 24 GAUGE	• GALVANIZED	CODE	A	B	C	OPENING	
		*1304	1 1/4" 32 mm	3/4" 19 mm	-	-	AUTHENTIK, MAJESTIK

FLASHING (CONTINUED ON NEXT PAGE)

DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
** 3 1/4 (83 mm) FOR MODELS 318, 718 AND 818, ALSO 3 1/2 (89 mm) FOR MODEL 1118	• GALVANIZED (EXCEPT 1118 AND 1218) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*318	1/2" 13 mm	6" 152 mm	5" 127 mm	1/2" 13 mm	TR 5, TR 7
		*718	3/4" 19 mm	6" 152 mm	4 3/4" 121 mm	3/4" 19 mm	TR 9, TR 80
		*818	15/16" 24 mm	6" 152 mm	4 3/4" 121 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*1018	1 5/8" 41 mm	5 1/8" 130 mm	4 5/8" 117 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 29, AUTHENTIK
		*1118	1 3/4" 44 mm	5" 127 mm	4 1/2" 114 mm	1 3/4" 44 mm	MAJESTIK
		*1218	1 1/4" 32 mm	5 1/2" 140 mm	4 3/4" 121 mm	1 1/4" 32 mm	CLASSIK
IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*408	5 1/2" 140 mm	6" 13 mm	SPECIFY	-	ALL ROOFING PROFILES

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


ROOFING


STANDARD STEEL MOULDINGS


STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**


➔ INDICATES THE COLOR SIDE


GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES

FLASHING (CONTINUATION FROM THE PREVIOUS PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*428	6" 152 mm	1" 25 mm	5" 127 mm	-	ALL ROOFING PROFILES

FRONT FLASHING							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*142	1 3/4" 44 mm	1 1/8" 29 mm	1/2" 13 mm	-	ALL ROOFING PROFILES
		*162	3 1/4" 82 mm	1 1/8" 29 mm	1/2" 13 mm	-	
		*192	6 1/4" 158 mm	1 1/8" 29 mm	1/2" 13 mm	-	

 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*402	3" 76 mm	1/2" 13 mm	SPECIFY	-	ALL ROOFING PROFILES

 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*410	1 1/8" 28.5 mm	1/2" 13 mm	SPECIFY	-	ALL ROOFING PROFILES

 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*422	2" 51 mm	1/2" 13 mm	2" 51 mm	-	ALL ROOFING PROFILES

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


ROOFING

STANDARD STEEL MOULDINGS


STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➡ INDICATES THE COLOR SIDE


GABLE END TRIM - CLASSIK™

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 STANDARD THICKNESS 26 GAUGE	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*1334	2 1/4" 57 mm	1 3/16" 30 mm	-	-	CLASSIK


GABLE STARTER - CLASSIK™

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 STANDARD THICKNESS 26 GAUGE	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*1332	2" 51 mm	-	-	-	CLASSIK

GABLE TRIM

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*430	3" 76 mm	1/2" 13 mm	3 5/8" 92 mm	-	TR 9, TR 80

GABLE TRIM - AUTHENTIK™

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 STANDARD THICKNESS 28 GAUGE	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*1312	2 3/4" 70 mm	1 3/4" 44 mm	-	-	AUTHENTIK


*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


ROOFING



STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

GABLE TRIM - MAJESTIK™						
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES
 STANDARD THICKNESS 28 GAUGE	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING
		*1322	2 3/4\" 70 mm	3/4\" 19 mm	-	-

HALF RIDGE VENT							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*406	4 1/2" 114 mm	1/2" 13 mm	SPECIFY	-	ALL ROOFING PROFILES

"J" TRIM						
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES
 THE COLOUR IS ON THE INSIDE	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING
		*1007	1 5/8" 41 mm	2" 51 mm	3 7/8" 98 mm	1 9/16" 1 5/8" 40 mm 42 mm
		*1107	1 3/4" 44 mm	2" 51 mm	3 7/8" 98 mm	1 3/4" 44 mm
		*1207	1 1/4" 32 mm	2" 51 mm	3 7/8" 98 mm	1 1/4" 32 mm
	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING
		*1047	1 5/8" 41 mm	2" 51 mm	3" 76 mm	1 9/16" 1 5/8" 40 mm 42 mm
		*1147	1 3/4" 44 mm	2" 51 mm	3" 76 mm	1 3/4" 44 mm
		*1247	1 1/4" 32 mm	2" 51 mm	3" 76 mm	1 1/4" 32 mm

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES





ROOFING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

RIDGE CAP (CONTINUED ON THE NEXT PAGE)

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 USE WITH VENTED RIDGE IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*125	4 3/8" 111 mm	1 3/8" 35 mm	1 1/8" 29 mm	-	ALL ROOFING PROFILES
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*130	2 1/2" 64 mm	-	-	-	ALL ROOFING PROFILES
		*131	4" 102 mm	-	-	-	
		*132	8 1/2" 216 mm	-	-	-	
		*133	11 1/2" 292 mm	-	-	-	
		*134	5 1/2" 140 mm	-	-	-	
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*147	7 1/2" 191 mm	-	-	-	ALL ROOFING PROFILES
		*148	10 1/2" 267 mm	-	-	-	
 ** 5" (127 mm) FOR MODELS 944 AND 1144	• GALVANIZED (EXCEPT 1144 AND 1244) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*344	1/2" 13 mm	2 1/2" 64 mm	4" 102 mm	1/2" 13 mm	TR 5, TR 7
		*744	3/4" 19 mm	2 1/2" 64 mm	3 11/16" 94 mm	3/4" 19 mm	TR 9, TR 80
		*844	15/16" 24 mm	2 3/8" 60 mm	3 11/16" 94 mm	15/16" 24 mm 1" 25 mm	CRG 7/8
		*944	1 9/16" 40 mm	3" 76 mm	4" 102 mm	1 9/16" 40 mm 1 5/8" 42 mm	TR 11, LC 29, AUTHENTIK
		*1144	1 3/4" 44 mm	2 15/16" 75 mm	3 7/8" 98 mm	1 3/4" 44 mm	MAJESTIK
		*1244	1 1/4" 32 mm	2 1/4" 57 mm	3 5/8" 92 mm	1 1/4" 32 mm	CLASSIK


*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


ROOFING


STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

RIDGE CAP (CONTINUATION FROM THE PREVIOUS PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
 MAXIMUM SLOPE OF 9/12	• GALVANIZED (EXCEPT 1154 AND 1254) • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*354	1/2" 13 mm	5" 127 mm	6 1/2" 165 mm	1/2" 13 mm	TR 5, TR 7
		*754	13/16" 21 mm	5" 127 mm	6 1/8" 156 mm	3/4" 19 mm	TR 9, TR 80
		*854	15/16" 24 mm	4 1/2" 114 mm	6 1/2" 165 mm	15/16" 1" 24 mm 25 mm	CRG 7/8
		*954	1 9/16" 40 mm	4" 102 mm	6 1/2" 165 mm	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 29, AUTHENTIK
		*1154	1 3/4" 44 mm	4" 102 mm	6 5/16" 160 mm	1 3/4" 44 mm	MAJESTIK
		*1254	1 1/4" 32 mm	4 3/8" 111 mm	6 7/16" 163 mm	1 1/4" 32 mm	CLASSIK

RIDGE - HIP CAP							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
 SPECIFY 1/2" [13 mm] IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*156	3" 76 mm	3" 76 mm	-	-	ALL ROOFING PROFILES
		*158	4" 102 mm	4" 102 mm	-	-	ALL ROOFING PROFILES

ROOF TRANSITION (CONSULT THE ESTIMATING DEPARTMENT)							
DESCRIPTION	FINISHES	DIMENSIONS				PROFILES	
 SPECIFY IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*928 SPECIAL ORDER	1 9/16" 41 mm	3" 76 mm	Calculated according to the roof transition angle	1 9/16" 1 5/8" 40 mm 42 mm	TR 11, LC 29, AUTHENTIK
		*1128 SPECIAL ORDER	1 3/4" 45 mm	3" 76 mm		1 3/4" 44 mm	MAJESTIK
		*1228 SPECIAL ORDER	1 1/4" 32 mm	3" 76 mm		1 1/4" 32 mm	CLASSIK

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES

ROOFING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**

➡ INDICATES THE COLOR SIDE

SIDE FLASHING

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED • ALUMINUM BRIGHT • ALUMINUM PREPAINTED	CODE	A	B	C	OPENING	
		*143	1 1/2" 38 mm	1/2" 13 mm	1 3/4" 44 mm	-	ALL ROOFING PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*404	3" 76 mm	1/2" 13 mm	SPECIFY	-	ALL ROOFING PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*412	1 1/8" 28.5 mm	1/2" 13 mm	SPECIFY	-	ALL ROOFING PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*423	2" 51 mm	1/2" 13 mm	2" 51 mm	-	ALL ROOFING PROFILES

SIDEWALL FLASHING (CONTINUED ON THE NEXT PAGE)

DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*118	2" 51 mm	2" 51 mm	-	-	ALL ROOFING PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*427	6" 152 mm	1" 25 mm	5" 127 mm	-	ALL ROOFING PROFILES


*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.


ROOFING


STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET (3.05 m)**
STANDARD THICKNESS **30 GAUGE**

➔ INDICATES THE COLOR SIDE

SIDEWALL FLASHING (CONTINUATION FROM THE PREVIOUS PAGE)							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*440	4 1/2" 114 mm	1/2" 13 mm	9" 227 mm	-	ALL ROOFING PROFILES
		*441	4 1/2" 114 mm	3/4" 19 mm	9" 227 mm	-	
		*442	4 1/2" 114 mm	1/2" 13 mm	SPECIFY	-	
		*443	4 1/2" 114 mm	3/4" 19 mm	SPECIFY	-	

STARTER FASTENER							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 STANDARD THICKNESS 24 GAUGE	• GALVANIZED	CODE	A	B	C	OPENING	
		*1302	2" 51 mm	3/4" 19 mm	-	-	AUTHENTIK, MAJESTIK

TRANSITION - REVERSED HIP CAP							
DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*425	6" 152 mm	7/8" 22 mm	5 1/8" 130 mm	-	TR 9, TR 80

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES




ROOFING

STANDARD STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)
STANDARD THICKNESS **30 GAUGE**

➡ INDICATES THE COLOR SIDE

VALLEYS


DESCRIPTION	FINISHES	DIMENSIONS					PROFILES
 3/4" [19 mm] IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*145	7 1/2" 191 mm	-	-	-	ALL ROOFING PROFILES
		*146	10 1/2" 267 mm	-	-	-	
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*169 ¹	4.5" 114 mm	-	-	-	ALL ROOFING PROFILES
		*170 ²	6" 152 mm	-	-	-	
		*171 ²	9" 229 mm	-	-	-	
		*172 ²	12" 305 mm	-	-	-	
		*173	18" 457 mm	-	-	-	
 IF THE ROOF PITCH IS NOT SPECIFIED WHEN ORDERING, A ROOF PITCH OF 5/12 WILL BE APPLIED.	• GALVANIZED • GALVALUME PLUS • PREPAINTED	CODE	A	B	C	OPENING	
		*178	17" 432 mm	1" 25 mm	-	-	ALL ROOFING PROFILES
		*179	SPECIFY	1" 25 mm	-	-	

¹ VALLEY 169 AVAILABLE IN STANDARD MOULDINGS WITH 90° AND 135°, 8 FEET LENGTH ONLY.

² VALLEYS 170, 171 AND 172 ALSO AVAILABLE IN STANDARD MOULDINGS WITH 90° AND 135°, 8 AND 10 FEET LENGTH AVAILABLE.
VALLEYS 170 AND 171 ALSO AVAILABLE FOR ASPHALT SHINGLES APPLICATION, 8 FEET LENGTH, SEE PAGE 92.

SERVICES	METAL	FLAT STEEL	ACCESSORIES	MOULDINGS	CONCEALED	ROOFING	SIDING	ROOFING	AVAILABLE	GENERAL
----------	-------	------------	-------------	-----------	-----------	---------	--------	---------	-----------	---------

FASCIA




79

STEEL MOULDINGS FOR ROOFING AND SIDING


MADE TO MEASURE STEEL MOULDINGS

STANDARD LENGTH **10 FEET** (3.05 m)


SOFFIT AND FASCIA

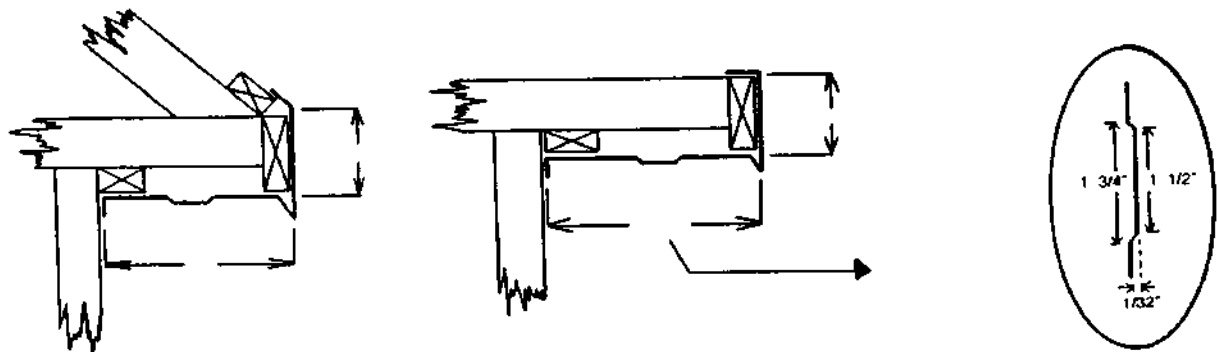

RAIL COVER FOR SLIDING DOOR



11,25" - 6 PLIS



17" - 6 PLIS

4" TO 12" WIDTH = 1 STRENGTHENING RIB RECOMMENDED
12" TO 24" WIDTH = 2 STRENGTHENING RIBS RECOMMENDED
FASCIA AND SOFFIT 24" AND MORE = 3 STRENGTHENING RIBS RECOMMENDED

▲ SPECIFY ANGLE OR SLOPE
*..SPECIFY

NOTE: A STRENGTHENING RIB CAN BE ADDED TO EACH MOULDING, PLEASE SPECIFY.

OTHER CUSTOM-MADE MOULDINGS FOR ROOFING AND SIDING ARE ALSO AVAILABLE. PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION.


CUSTOM MOULDINGS

A MULTITUDE OF POSSIBILITIES FOR YOUR ARCHITECTURAL STEEL MOULDINGS

HERE ARE FEW EXAMPLES
OF WHAT CAN BE IMAGINED AND REALIZED:

- Rounded shapes*
- Bending length from 40" to 21'*
- Bending thickness from 18 GA (0.049") to 30 GA (0.015")*

PRODUCED ACCORDING TO CUSTOMER SPECIFICATIONS, THESE MOULDINGS CAN BE MANUFACTURED IN ANY COLOUR, WIDTH AND GAUGE FROM OUR STEEL SELECTION*

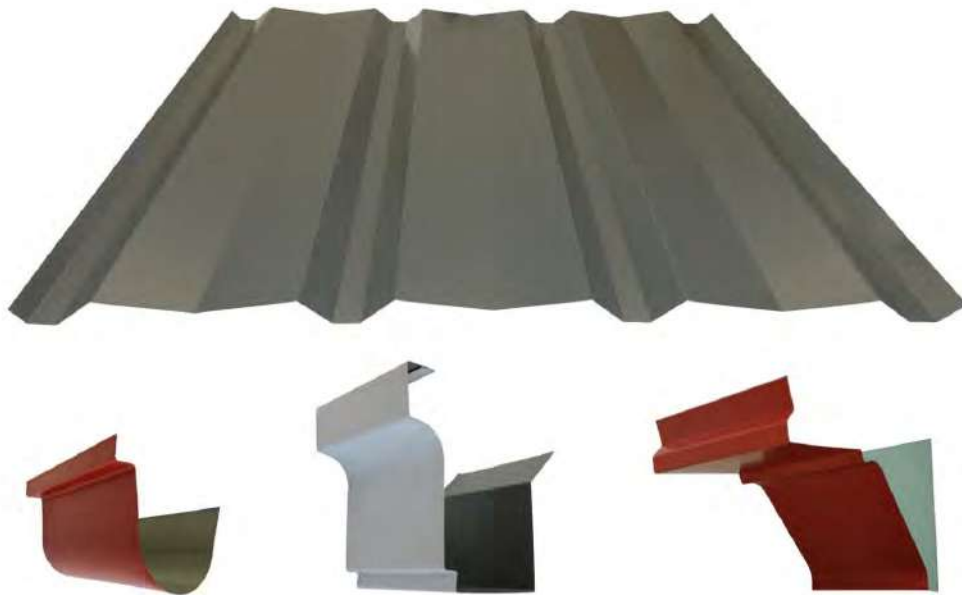

*Limitations apply for the rounded shapes

CONTACT OUR ESTIMATION DEPARTMENT TO SUBMIT YOUR PROJECT AND RECEIVE A QUOTE.

ACCESSORIES





● LC 19 Siding Profile - Colour QC 807 Autumn


ACCESSORIES



ALL ROOFING PROFILES

GENERAL
AVAILABLE COLOURS
ROOFING
SIDING
ROOFING AND SIDING - CORRUGATED
CONCEALED FASTENERS
MOULDINGS
ACCESSORIES
FLAT STEEL
METAL PRODUCTS
SERVICES

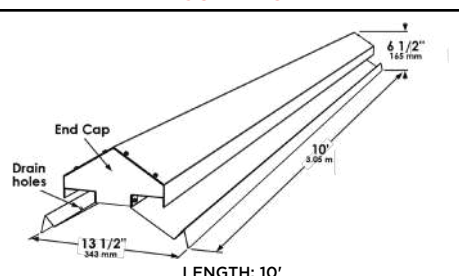VENTED RIDGE* (VENTILATION 170 sq.in) SPECIAL ORDER		
DESCRIPTION	FINISHES	
 LENGTH: 10' END FLANGES AND UNION PLATE INCLUDED.	A 4/12 VENTED RIDGE THAT CAN BE INSTALLED ON ROOFS WITH 2/12 TO 6/12 PITCH. VENTED RIDGE FOR PITCHES OF 7/12 TO 12/12 AVAILABLE UPON REQUEST, DEFLECTORS REQUIRED. AVAILABLE IN THE WHOLE COLLECTION OF DUCHESNE COLOURS.	

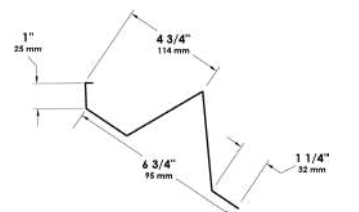DEFLECTOR FOR VENTED RIDGE* SPECIAL ORDER		
DESCRIPTION	FINISHES	
	FOR PITCHES OF 7/12 TO 12/12 AVAILABLE IN THE WHOLE COLLECTION OF DUCHESNE COLOURS.	

LOW PROFILE VENT* (VENTILATION 283 sq.in) SPECIAL ORDER		
DESCRIPTION	FINISHES	
 LENGTH: 48" END FLANGES INCLUDED.	AVAILABLE IN THE WHOLE COLLECTION OF DUCHESNE COLOURS.	

RUBBER PIPE FLASHINGS			
DESCRIPTION		FITS PIPE SIZE	
		NUMBER	DIMENSION
	MASTER FLASH	1	1/4" TO 2"
		2	1 1/4" TO 3"
		3	1/4" TO 4"
		4	3" TO 6"
		5	4" TO 7"
		6	5" TO 9"
		7	6" TO 11"
		8	7" TO 13"
		9	10" TO 18"
	RETRO FLASH	-	1/2" TO 4"
		-	4" TO 9 1/4"
		-	9 1/4" TO 16 1/4"

*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.

ACCESSORIES

SCREWS FOR ROOFING AND SIDING

DESCRIPTION		HEAD FINISHES
METAL/STEEL SCREWS - Galvanized steel head RECOMMENDED FOR SIDING		
	NO. 12 X 1" 5/16" HEAD WITH NEOPRENE WASHER * QC 015 VELVET LINEN, QC 023 IVY GREEN, QC 108 ARTICHOKE, QC 120 ICE WHITE, QC 306 CHARCOAL, QC 7500 METALLIC GREY, QC 641 SABLE AND QC 696 ANTIQUE WHITE. OTHER COLOURS AVAILABLE ON SPECIAL ORDER (MINIMUM ORDER REQUIRED).	GALVANIZED PREPAINTED*
METAL/STEEL SCREWS - Steel head RECOMMENDED FOR SIDELAP STITCHING		
	NO. 14 X 7/8" 5/16" HEAD WITH NEOPRENE WASHER *AVAILABLE ON SPECIAL ORDER (MINIMUM ORDER REQUIRED).	GALVANIZED* PREPAINTED*
NEOPRENE WASHERS		
	DIA. 1/4" INTERIOR DIAMETER 1/4"	STEEL AND NEOPRENE

DESCRIPTION		HEAD FINISHES
METAL/WOOD SCREWS - Steel head RECOMMENDED FOR SIDING		
	NO. 14 X 1 1/2" 3/8" HEAD WITH NEOPRENE WASHER	GALVANIZED
	NO. 14 X 3/4" 3/8" HEAD WITH NEOPRENE WASHER	
	NO. 14 X 2" 3/8" HEAD WITH NEOPRENE WASHER	
METAL/WOOD SCREWS - Steel head		
	NO. 10 X 1" 1/4" HEAD WITH NEOPRENE WASHER	GALVANIZED PREPAINTED
	RECOMMENDED FOR ROOFING (TR 5 AND TR 7) NO. 10 X 1 1/2" 1/4" HEAD WITH NEOPRENE WASHER	GALVANIZED PREPAINTED
	RECOMMENDED FOR ROOFING (TR 9) NO. 10 X 2" 1/4" HEAD WITH NEOPRENE WASHER	GALVANIZED PREPAINTED
	NO. 10 X 2 1/2" 1/4" HEAD WITH NEOPRENE WASHER *AVAILABLE ON SPECIAL ORDER (MINIMUM ORDER REQUIRED).	GALVANIZED* PREPAINTED*
	NO. 10 X 3" 1/4" HEAD WITH NEOPRENE WASHER *AVAILABLE ON SPECIAL ORDER (MINIMUM ORDER REQUIRED).	GALVANIZED* PREPAINTED*
METAL/STEEL SCREWS - Pancake head RECOMMENDED FOR CONCEALED FASTENERS PROFILE		
 WOOD	NO. 10 X 1"	GALVANIZED
	NO. 12 X 1"	
 STEEL	NO. 10 X 1" SELF DRILLING	GALVANIZED
	NO. 12 X 1" SELF DRILLING	

ACCESSORIES

CAULKING, TOUCH-UP PAINT, ROOFING UNDERLAYMENT, NAILS

GENERAL

AVAILABLE
COLOURS

ROOFING

SIDING

ROOFING
AND SIDING -
CORRUGATED

CONCEALED
FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL
PRODUCTS

SERVICES

CAULKING




SUPRA THERMIK
CARTRIDGE OF 300 ml (10.6 oz)

FOR COLOURS:

STEEL: QC 020 SILICA, QC 022 GRANITE, QC 024 KHAKI BROWN, QC 228 METRO BROWN, QC 229 DARK BROWN, QC 262 BLACK, QC 315 TAN, QC 317 WHITE, QC 641 SABLE, QC 730 REGENT GREY, TRANSLUCID.


ROOFING UNDERLAYMENT



ROOFING UNDERLAYMENT 1000 sq.ft (93 sq.m)
4' X 250' (1.22 m X 76.2 m)

ADHESIVE ROOFING UNDERLAYMENT 216 sq.ft (20 sq.m)
3' X 72' (0.91 m X 22 m)

PLASTIC CAP NAILS



IDEAL FOR THE INSTALLATION OF ROOFING UNDERLAYMENT
OFFERED IN LENGTHS OF 2", 2 1/2" AND 3"





PLEASE REFER TO OUR CATALOGUE UNDER THE CONSTRUCTION NAIL SECTION

ACCESSORIES



SNOW GUARDS AND SNOW BREAKER

THESE PRODUCTS ARE MADE UPON REQUEST, NONE RETURNABLE IF WRONGLY ORDERED

Always consult with a professional before installation. A qualified professional should be consulted to determine the type of snow guard system and installation most suitable for your roof, as this will vary according to geographic region, weather conditions, the roof's load bearing capacity, roof pitch, and sub-structure features.


TUBE-TYPE SNOW GUARD		The minimum fastening depth required for: Wood: 3/4" (19 mm) Steel: .049" (1.25 mm)
 The set includes: (A) Brackets, natural or painted 2 G90 galvanized steel (12 gauge - 0.109") with one, two or three 1 1/4" diameter holes; (B) Plastic protectors for each hole; (C) 7 metal/wood screws (#14 x 2") with neoprene washers and anti-corrosion coating per bracket; Note: The 1-hole bracket comes with 6 screws. (D) Natural or painted Galvalume™ tubing, 1/16" thick x 1" wide x 4' long with a reduced 3" portion; (E) Protective caps (6 / box of tubes).	1-HOLE BRACKET*	
	2-HOLE BRACKET	
	3-HOLE BRACKET	
	4' LONG STEEL TUBE GALVALUME**	 45" USABLE

* 1-HOLE BRACKET IS DIFFERENT FROM THE 2-HOLE AND 3-HOLE BRACKETS.
AVAILABLE NATURAL FINISH OR IN ALL DUCHESNE'S STEEL COLOURS. (SEE COLOUR AVAILABILITY).
FOR INFORMATION ABOUT INSTALLATION, PLEASE REFER TO DUCHESNE SNOW GUARD BROCHURE.
INSTALLS WITH 1/8"X1"X25' BUTYL TAPE.

INDIVIDUAL SNOW GUARD		The minimum fastening depth required for: Wood: 3/4" (19 mm) Steel: .049" (1.25 mm)
 The set includes: (Ai) Snow guard, natural or painted 2 G90 galvanized steel (12 gauge - 0.109") with a central opening and 90° angle; (Bi) 3 metal/wood screws (#14 x 2") with neoprene washers.		

AVAILABLE NATURAL FINISH OR IN ALL DUCHESNE'S STEEL COLOURS. (SEE COLOUR AVAILABILITY).
FOR INFORMATION ABOUT INSTALLATION, PLEASE REFER TO DUCHESNE SNOW GUARD BROCHURE.
INSTALLS WITH 1/8"X1"X25' BUTYL TAPE.

STANDARD LENGTH **10 FEET (3.05 m)**

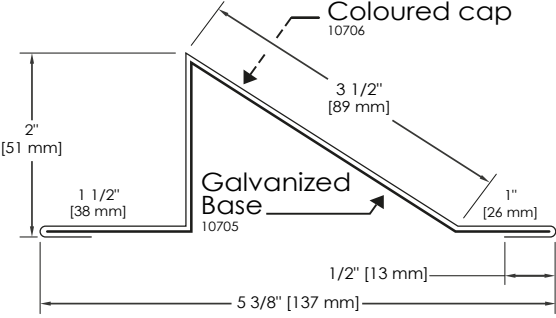SNOW BREAKER		
DUCHESNE DOES NOT GUARANTEE ANY SNOW GUARD PERFORMANCE WITH THE SNOW BREAKER. FOR SNOW GUARD PERFORMANCES, PLEASE USE THE TUBE-TYPE SNOW GUARD.		
	SNOW BREAKER 18 GA GALVANIZED BASE + 28 GA* COLOUR CAP	ASSEMBLY REQUIRED



* CERTAIN COLOURS ARE AVAILABLE IN 30 OR 26 GAUGE ONLY. PLEASE REFER TO THE AVAILABILITY CHART.

ACCESSORIES

PVC FOAM CLOSURE STRIPS AND ACCESSORIES

FOAMS CLOSURE STRIP NON-VENTED			
DESCRIPTION	PROFILES	DIMENSIONS	
 OVER THE SHEET  UNDER THE SHEET RECOMMENDED TO CLOSE OPENINGS AT THE END OF SHEETS.		LENGTH	WIDTH
	TR 5	30"	1"
	TR 7	44.75"	1"
	TR 9	35.4"	1"
	TR 11	42.91"	1"
	TR 80	36"	1"
	CRG 7/8	38.58"	1"
	LC 15	47"	1"
	LC 17	47"	1"
	LC 19	43.20"	1"
	LC 23	42"	1"
	LC 25	42"	1"
	LC 27	39"	1"
	LC 29	39"	1"
	LC 31	40.18"	1"
	LC 33	40.18"	1"

FOAM CLOSURE STRIP VENTED			
DESCRIPTION	PROFILES	DIMENSIONS	
 OVER THE SHEET VENTILATION OF 4.5 sq.in PER LINEAR FOOT		LENGTH	WIDTH
	TR 9	35.4"	1.5"
	TR 80	36"	1.5"

UNNOTCHED CLOSURE STRIP AND SELF EXPANDING FOAM SEALANT TAPE				
DESCRIPTION	PROFILES	DIMENSIONS		
 UNNOTCHED CLOSURE STRIP		THICKNESS	LENGTH	WIDTH
	ALL PROFILES	1"	4'	2"
 SELF EXPANDING FOAM SEALANT TAPE	TR 5, TR 7, TR 9, TR 80	1/4" EXPANDABLE UP TO 1"	19.68'	3/4"

CONSTRUCTION TAPES				
DESCRIPTION	PROFILES	DIMENSIONS		
METAL BUILDING TAPE	ALL PROFILES	THICKNESS	LENGTH	WIDTH
		1/16"	50'	1/4"
		1/16"	50'	1/2"
GREY BUTYL TAPE	ALL PROFILES	1/8"	25'	1"

ROLL RIDGE END FOAM CLOSURE				
DESCRIPTION	PROFILES	DIMENSIONS		
UNIT		THICKNESS	LENGTH	WIDTH
	ALL PROFILES	1"	8 1/2"	3 3/8"

GENERAL

AVAILABLE COLOURS

ROOFING

SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS

MOULDINGS

ACCESSORIES


FLAT STEEL

METAL PRODUCTS

SERVICES

ACCESSORIES

SUB-GIRTS

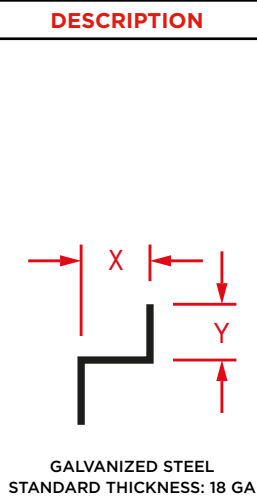STANDARD LENGTH **10 FEET (3.05 m)****"Z" BAR** (manufactured on request)**DESCRIPTION****CODES****DIMENSIONS****CONTOUR**

X

Y

Z-75

3/4"
(19 mm)1 31/64"
(38 mm)3 11/16"
(94 mm)

Z-100

1"
(25 mm)1 1/2"
(38 mm)4"
(102 mm)

Z-150

1 1/2"
(38 mm)1 7/16"
(37 mm)4 23/64"
(111 mm)

Z-200

2"
(51 mm)1 13/32"
(36 mm)4 51/34"
(122 mm)

Z-250

2 1/2"
(64 mm)1 27/54"
(36 mm)5 1/3"
(135 mm)

Z-300

3"
(76 mm)1 1/2"
(38 mm)6"
(152 mm)

Z-350

3 1/2"
(89 mm)1 43/64"
(42 mm)6 55/64"
(174 mm)


Z-400

4"
(102 mm)1 27/64"
(36 mm)6 55/64"
(174 mm)

Z-450

4 1/2"
(114 mm)1 3/4"
(44 mm)8"
(203 mm)

Z-500

5"
(127 mm)1 1/2"
(38 mm)8"
(203 mm)STANDARD LENGTH **10 FEET (3.05 m)****"U" CHANEL** (manufactured on request)**DESCRIPTION****CODES****DIMENSIONS****CONTOUR**

X

Y

YY

U-75

3/4"
(19 mm)3 3/4"
(95 mm)1/2"
(13 mm)5"
(127 mm)

U-100

1"
(25 mm)3 1/2"
(89 mm)3/4"
(19 mm)5 1/4"
(133 mm)

U-150

1 1/2"
(38 mm)3"
(76 mm)1"
(25 mm)5 1/2"
(140 mm)

U-200

2"
(51 mm)2 3/4"
(70 mm)1 1/4"
(32 mm)6"
(152 mm)

U-250

2 1/2"
(64 mm)2 5/16"
(59 mm)1 3/4"
(44 mm)6 9/16"
(167 mm)

U-300

3"
(76 mm)2 5/8"
(67 mm)1 9/16"
(40 mm)7 3/16"
(183 mm)

U-350

3 1/2"
(89 mm)2 11/32"
(60 mm)1 11/32"
(34 mm)7 3/16"
(183 mm)

U-400

4"
(102 mm)3 1/2"
(89 mm)1 1/2"
(38 mm)9"
(229 mm)

U-450

4 1/2"
(114 mm)3"
(76 mm)1 1/2"
(38 mm)9"
(229 mm)

U-500

5"
(127 mm)2 3/4"
(70 mm)1 1/4"
(32 mm)9"
(229 mm)

OTHER DIMENSIONS AND THICKNESSES AVAILABLE UPON REQUEST.

FLAT STEEL




FLAT STEEL IN SHEETS AND COILS

GALVANIZED STEEL Z275 (G90) GALVALUME STEEL AZM150 (AZ50) GALVANIZED PREPAINTED STEEL							
GAUGE	DIMENSIONS		FINISHES			PACKAGING	
	WIDTH	LENGTH	GALVANIZED	GALVALUME PLUS	PREPAINTED**	SHEET	COIL
30 GAUGE	*11 1/2"	50'	●				●
	*24"	50'	●				●
	*30"	50'	●				●
	*36"	50'	●	●	●		●
	*42"	50'			●		●
	*24"	96"	●			●	
	*30"	96"	●			●	
	*36"	96"	●	●	●	●	
	*36"	120"		●	●	●	
	*42"	96"	●	●	●	●	
	*42"	120"		●	●	●	
28 GAUGE	*36"	50'	●		●		●
	*42"	50'			●		●
	*36"	96"	●	●	●	●	
	*36"	120"	●	●	●	●	
	*42"	96"	●	●	●	●	
	*42"	120"		●	●	●	
26 GAUGE	*36"	50'	●				●
	*42"	50'			●		●
	*36"	96"	●	●		●	
	*36"	120"		●		●	
	*42"	96"	●	●	●	●	
	*42"	120"		●	●	●	
	*43.875"	96"		●		●	
	*43.875"	120"		●		●	
	*50.875"	96"	●		●	●	
	*50.875"	120"	●		●	●	
24 GAUGE	*42"	50'	●		●		●
	*36"	96"	●			●	
	*42"	96"	●		●	●	
	*42"	120"	●		●	●	
	*43.875"	96"		●		●	
	*43.875"	120"		●		●	
	*50.875"	96"	●		●	●	
	*50.875"	120"	●		●	●	
22 GAUGE	*50.875"	96"			●	●	
	*50.875"	120"			●	●	
20 GAUGE	*48"	96"	●			●	
	*48"	120"	●			●	
18 GAUGE	*48"	96"	●			●	
	*48"	120"	●			●	


*PLEASE CONTACT THE SALES DEPARTMENT FOR MORE INFORMATION ABOUT THE DELIVERY SCHEDULE.
 ** PLEASE REFER TO PAGES 10 AND 11 FOR COLOUR AVAILABILITY PER WIDTH AND GAUGE.

METAL PRODUCTS

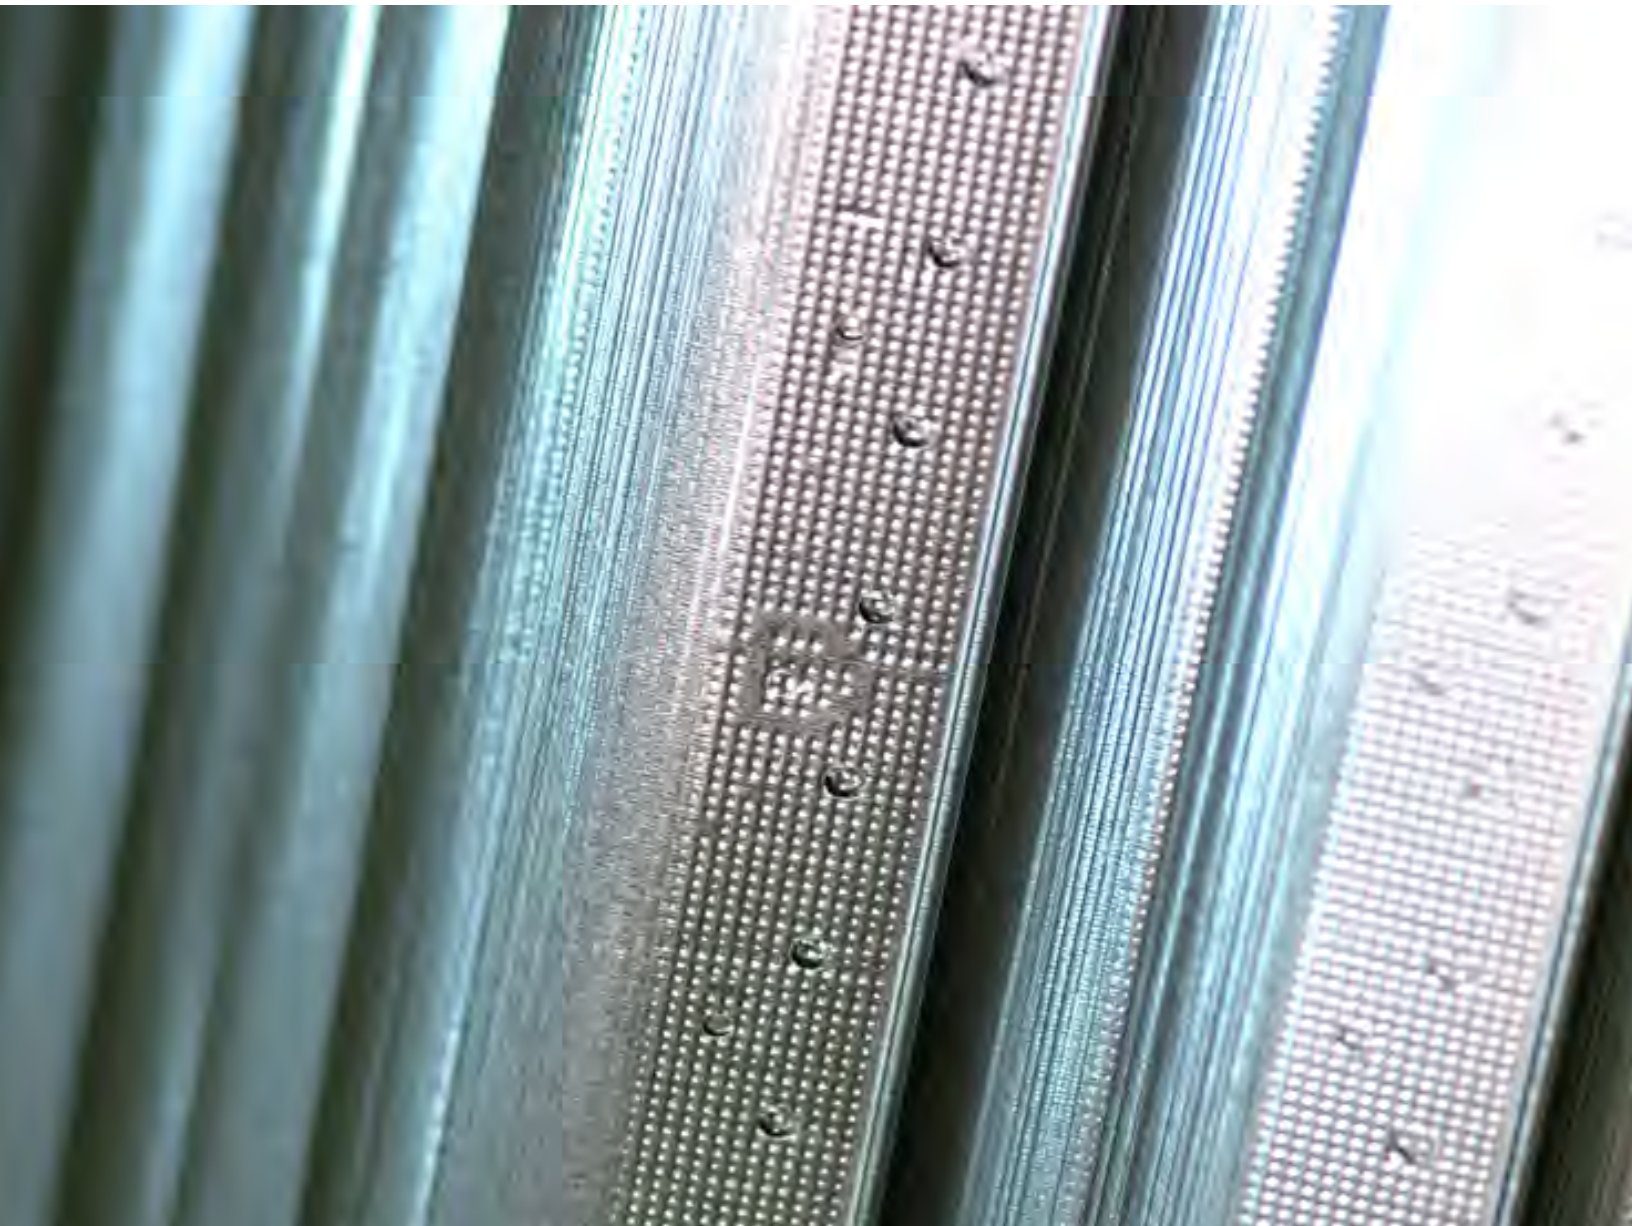

METAL PRODUCTS


DRYWALL CORNER BEAD AND L TRIM (PLASTER STOP)

GALVANIZED SIDE FLASHING							
DESCRIPTION	FINISHES	DIMENSIONS					
	GALVANIZED STEEL	CODE	A	B	C	LENGTH	COVERAGE PER PACKAGE
		DCG-143*	2" 51 mm	1/2" 13 mm	1 3/4" 44 mm	9.84' 3 m	20 PIECES 196.85 lin. ft 60 lin. m

* Discontinued product. Available while quantities last. Please verify availability.

METAL PRODUCTS

FRONT FLASHING, SIDE FLASHING AND VALLEY FOR ASPHALT SHINGLES

GALVANIZED FRONT FLASHING							
DESCRIPTION	FINISHES	DIMENSIONS					
	GALVANIZED STEEL	CODE	A	B	C	LENGTH	COVERAGE PER PACKAGE
		DFG-142.9	1 3/4" 44 mm	1 1/2" 38 mm	1/2" 13 mm	9.84' 3 m	10 PIECES 98.4 lin. ft 30 lin. m
		DFG-142.8	1 3/4" 44 mm	1 1/2" 38 mm	1/2" 13 mm	8' 2.44 m	12 PIECES 96 lin. ft 29.36 lin. m
		DFG-162.9	3 1/4" 82 mm	1 1/2" 38 mm	1/2" 13 mm	9.84' 3 m	10 PIECES 98.4 lin. ft 30 lin. m
		DFG-192.9	6 1/4" 158 mm	1 1/2" 38 mm	1/2" 13 mm	9.84' 3 m	12 PIECES 98.4 lin. ft 30 lin. m

GENERAL

AVAILABLE COLOURS

ROOFING

SIDING

ROOFING AND SIDING - CORRUGATED

CONCEALED FASTENERS

MOULDINGS

ACCESSORIES

FLAT STEEL

METAL PRODUCTS

SERVICES

SERVICES



● TR 9 Siding Profile - Colour QC 317 White

SERVICES	METAL	FLAT STEEL	ACCESSORIES	MOULDINGS	CONCEALED	ROOFING	SIDING	ROOFING	AVAILABLE	GENERAL
	METAL	FLAT STEEL	ACCESSORIES	MOULDINGS	CONCEALED	ROOFING	SIDING	ROOFING	AVAILABLE	GENERAL

Whether to confirm a choice of colour or to visualize the rendering of a siding model, nothing compares to a genuine product sample. Duchesne product samples are available in a self-service mode at most building material dealers.

Visit your dealer and ask about Duchesne product samples. Bring a copy of your project executed with the Duchesne Home Visualizer and get a complete quote.

It is also possible to order a customized sample with a minimum length of 9" by calling directly to our customer service.



Specific board for Authentik™ concealed fasteners



Large colour samples

Note: It is possible to order physical steel samples with a minimum length of 9"



DUCHESNE

Solidly Dependable®

DUCHESNE ET FILS LTÉE

871, boulevard Duchesne

Yamachiche, Quebec G0X 3L0

t : 1 800 567-2164

www.duchesne.ca